

TRISORT SDX Sorter



Shoe Sorter

Simplified Maintenance

- Top-access slat removal, minimal inter-slat gaps and no guards to remove

Quiet Operation


- Precision ball bearing wheels and low-friction lubricated plastics

Jam Resistant

- Pop-Off/Snap-On shoes are easily replaced in seconds, minimizing jams



TRISORT SDX Sortation Capacities		
Max Sorter Speed	600 fpm (3 m/s)	
Package Size Range	Minimum	3" x 3" x 0.25" 75mm x 75mm x 6mm
	Maximum	80" x 21" x 21" 2000mm x 530mm x 530mm
Package Weight Range	Minimum	0.2 lbs (100g)
	Maximum	100 lbs (45kg)

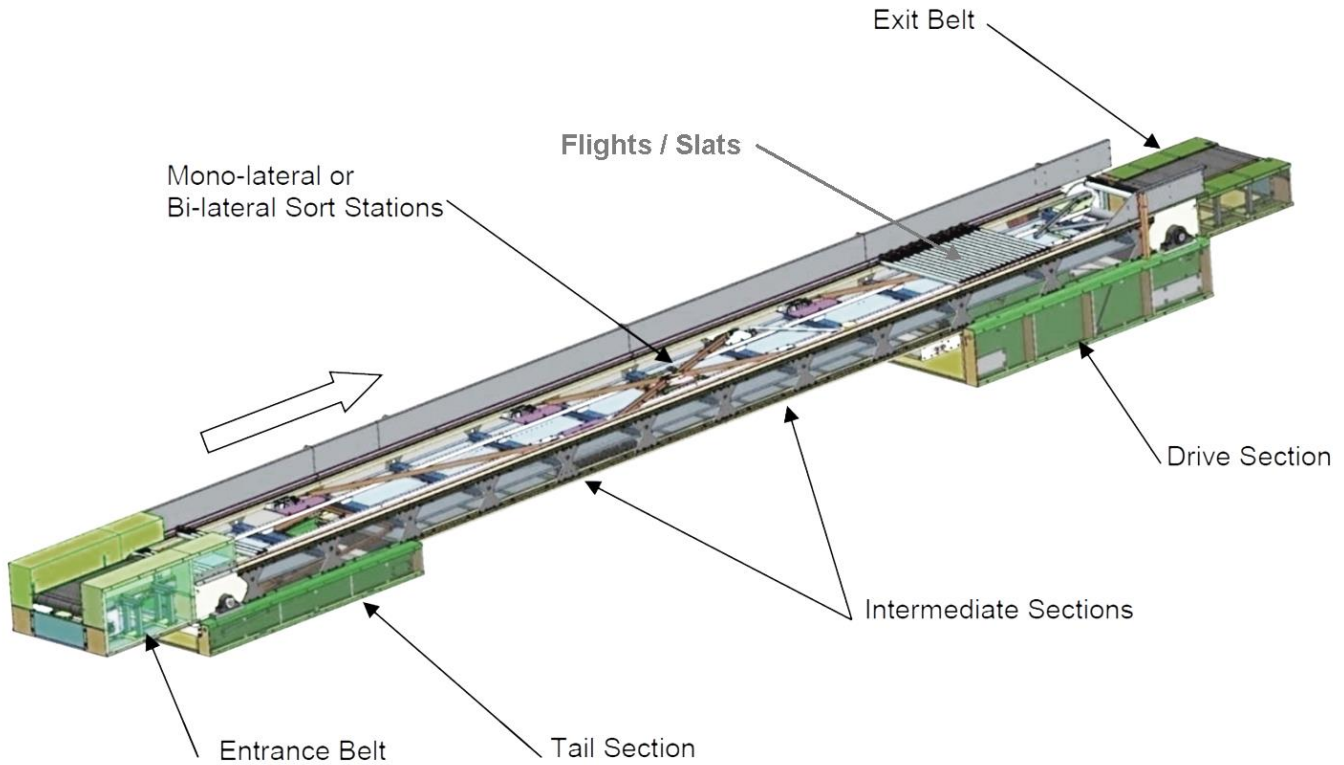

TRISORT SDX Bi-Lateral Divert Reference Dimensions			
	Dimensions	Sorter #1	Sorter #2
Effective Width	inches	24	39.4
	mm	600	1000
Overall Width	inches	49	64.5
	mm	1240	1640
20° Divert Pitch	inches	110.25	153.5
	mm	2801	3900
30° Divert Pitch	inches	75	102.5
	mm	1907	2600

Information is subject to change without notice. Please contact your Fives Intralogistics representative for updated specifications and configurations.

Simplicity meets practicality in the **TRISORT SDX**



CONTACT US:

Fives Intralogistics
500 East Burnett Avenue
Louisville, KY 40217

T: +1 502 636 1414
fivesintralogistics-us@fivesgroup.com
www.fivesgroup.com