

STANDARD FEATURES

- Antistatic wheels have surface resistivity of $>10^5$ to $< 10^9$ ohms when new.
- Sintered wheel bearings.
- Heat treat hardened and factory lubricated swivel raceways.
- Zinc-plate finish for corrosion resistance.

The purpose of a Conductive Wheel is to dissipate the build-up of static electricity that could possibly damage the sensitive equipment being transported. It is very important to keep the surface of the wheel clean to maintain its' effectiveness.

Applications: computers, electronics, and the medical industry.



**Driven
to Exceed
Expectations**


800-558-0117

www.erwagner.com

Caster Specifications

A Wheel Dia. (inches)	Approximate Tread Width (inches)	Caster Capacity (pounds)	B Height (inches)	C Swivel Radius (inches)	Approximate Weight (pounds)*	Swivel Plate Part No.	Rigid Part No.	Swivel Stem Part No.
CONDUCTIVE WHEEL ALL RUBBER SOFT TREAD								
3	1	100	3-13/16	2-3/4	1-1/4	2F6803S070001**	1F6303S070001**	2F6903S070001**
4	1	115	4-13/16	3-1/4	1-1/2	2F6804S070001**	1F6304S070001**	2F6904S070001**
5	1	125	5-13/16	4	2	2F6805S070001**	1F6305S070001**	2F6905S070001**
3	1-1/4	125	3-3/4	2-3/8	1-1/4	2F9803S070001**	1F9303S070001**	2F9903S070001**
4	1-1/4	165	4-11/16	3-3/8	1-1/2	2F9804S070001**	1F9304S070001**	2F9904S070001**
5	1-1/4	190	5-5/8	4-1/8	2-1/4	2F9805S070001**	1F9305S070001**	2F9905S070001**
4	1-3/8	200	5-3/8	3-3/8	2-3/4	3F2804S070001**	3F2304S070001**	3F2904S070001**
5	1-3/8	240	6-3/8	3-15/16	3-1/2	3F2805S070001**	3F2305S070001**	3F2905S070001**
5	2	350	6	4-3/16	3-3/4	1F3805S07000100	1F3005S07000100	N/A

(*) Rigid casters are lighter than swivel casters.

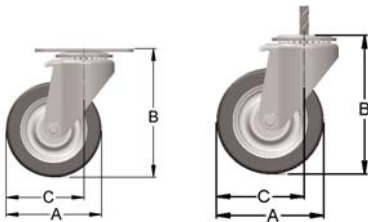

**** Stem Code Number Stem Choices**

Friction Ring Stems

Threaded Stems



Stem Size Dia. x Length (D) x (L)	** Stem Code Number
7/16 x 1-3/8	01
7/16 x 1-29/32	03

Stem Size Dia. -TPI xLength (D (TPI) (L)	** Stem Code Number
3/8-16 x 1	04
3/8-16 x 1-1/2	07
1/2-13 x 1	61
1/2-13 x 1-1/2	10




**** Plate Code Number Top Plate Choices**




Overall Size: 2-3/4" x 3-3/4"
Hole Spacing: 1-3/4" x 3"
Hole Diameter: 11/32"
Bolt Diameter: 5/16"



Overall Size: 2-3/4" x 3-3/4"
Hole Spacing: 1-3/4" x 2-5/8" to 3"
Hole Diameter: 11/32" x 1/2" slots
Bolt Diameter: 5/16"



Overall Size: 3-1/8" x 4-1/8"
Hole Spacing: 1-3/4" x 3" to 2-3/8" x 3-3/8"
Hole Diameter: 3/8" x 3/4" slots
Bolt Diameter: 5/16"



Overall Size: 3-3/4" x 4-5/8"
Hole Spacing: 2-5/8" x 3-5/8" to 3" x 3"
Hole Diameter: 3/8" x 3/4" slots
Bolt Diameter: 5/16"

Other Stem and Plate sizes available on request.

**Driven
to Exceed
Expectations**

800-558-0117

www.erwagner.com

