



ARPAC *STRETCH*™ ELECTRO-WRAP EW-SERIES®

FLOOR MOUNTED SEMI-AUTOMATIC ROTARY TOWER STRETCH WRAPPER


The EW-SERIES® rotary tower stretch wrapper is the ideal solution for wrapping unstable loads or those that are either too light or too heavy to rotate on a platform wrapper.

The heavy-duty EW-SERIES® wraps from overhead with the film carriage revolving around the stationary pallet load. A robust swing arm drive system uses a slewing bearing design that ensures long life with minimal maintenance.

The EW-SERIES® is typically installed in environments that utilize a fork truck or pallet jacks to load and unload. This system can be customized with specified conveyors to optimize material handling. RT-SERIES wrappers are also ideal for wash down environments.

The EW-SERIES® is part of a robust line of stretch wrapping equipment designed to maximize stretch film usage while ensuring the very best load unitization.

The EW-SERIES® is manufactured in the USA in accordance with ARPAC's Lean Manufacturing Process (AM²) to ensure quality, performance and value. The wrapper is sold and serviced through our nationwide distributor network.

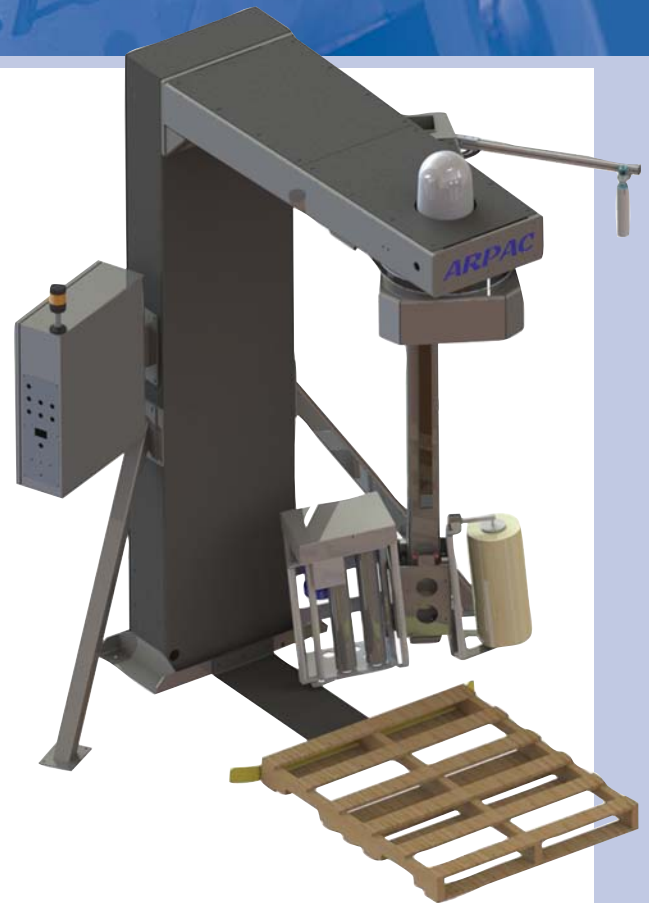

User-Friendly Operator Controls



EZ-LOAD Carriage Assembly with "Swift Change" Film Mandrel



Heavy Duty Slewing Bearing and NEMA 3R Commutator

FEATURES

- Heavy-duty reinforced structural steel construction for around-the-clock operation
- Baked on powder coat finish provides a durable scratch resistant surface and prevents corrosion
- Allen-Bradley® Micrologix PLC
- NEMA 12 electrical panel
- NEMA 3R commutator – conducting electricity between rotating arms and fixed frame allows for an enhanced trouble-free, longer life
- Rotary arm has a dual belt drive
- Main drive gear box is maintenance free
- Heavy duty slewing bearing to support rotary tower
- Setup is quick and easy!
- User-friendly operator controls
- Built in self-diagnostics
- Positive home position alignment
- Top over-wrap and cycle pause control
- Electronic film tension adjustment control
- Carriage pause control (banding)
- Adjustable top and bottom wrap counters (0-7)
- Photo electric load height sensor that detects most dark-colored loads
- Safety sensor stops arm rotation in emergencies
- Flashing safety light warns that machine is in operation
- Variable arm speed (0-15RPM)
- Variable carriage speed (0-24FPM)
- EZ-LOAD FILM-SAVR® Powered Pre-Stretch 150%-300% (200% standard)
- Wraps down to 3" from the floor
- Tower wrap height up to 80"
- Anti-static rollers
- UL approved components
- Lifetime warranty on ARPAC pre-stretch rollers

SPECIFICATIONS

Power Requirements


- Electrical: 120V, 1Ph, 60Hz, 20A, 2.4kW
- NEMA 12 electrical panel

Load Sizes

- Max. Load Size: 53"L x 53"W x 80"H
- Wrap Diameter Clearance: 75"
- Max. Load Weight: dependent on floor capacity

OPTIONS

- Tower extensions up to 110" wrap height
- Arm extension for 85" wrap diameter
- AFTD automatic film tear device tears film at the end of the wrapping cycle
- Manual Roping
- NEMA 4X controls
- Electric clamp, cut and wipe down
- All ARPACSTRETCH™ equipment can be custom designed to suit your specific application
- More options available, consult your local ARPACSTRETCH™ representative

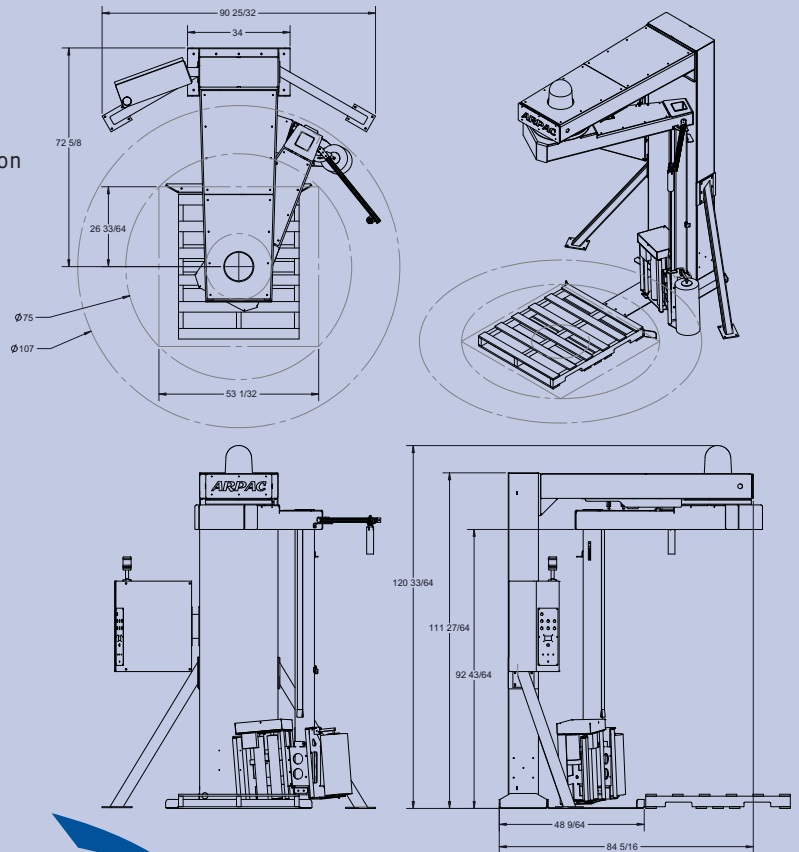

EW-S5-71 Shown

