


# FOX IV 5400 Series Zebra® Xi4™ Based Printer-Applicators

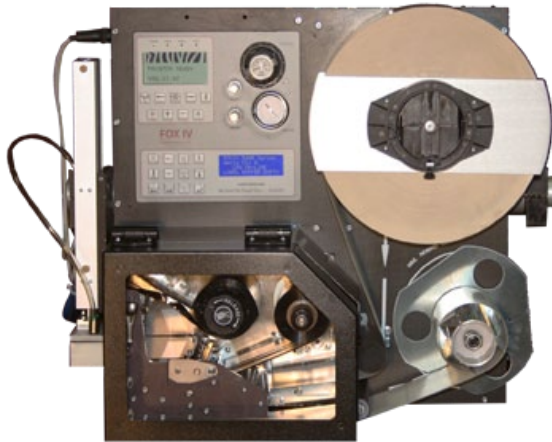

## **FOX IV Technologies 5400 series**

featuring the Zebra Xi4 series print engines are rugged, dependable label printer-applicators with the versatility to meet most labeling applications.

**Compatibility:** Have an existing Zebra desktop printer? The FOX IV 5400 series Printer-applicators are compatible with the ZPL® programming language and ZebraNet™ Print Server enabling use of existing data streams.

**Ease of Use:** Designed to be simple to operate and maintain, the 5400 series has many user-friendly features. Media changes are fast and simple with silk screened media paths and a standard Swing-Away cylinder which allows full access to the print engine for media loading and print head changes. The

rotatable control panel ensures that operators can easily check settings and indicators.

**Production Ready:** With 4 different print engines and two printer-applicator sizes, the 5400 series can fit into most existing production lines. The compact Mini is ideal for low-run or space limited environments while the workhorse Standard enables extended production runs.

**Customizable:** Customize the 5400 to meet your specific application needs from two-panel labeling, wrap-around, delicate surfaces and more. Our in-house engineering team can design solutions to meet the most challenging labeling applications.

## FEATURES

- Mini and Standard Sizes for production efficiency
- 4 print engine sizes
- Compatible with Zebra desktop printers, ZebraNet
- Rotatable, multilingual backlit LCD control panel for ease of use
- Swing-away cylinder for access to print head
- Industrial design
- Screened media paths to ensure accurate label and ribbon loading
- Standard and custom application apparatus

# TECHNICAL SPECIFICATIONS - 5400 Series Zebra Xi4 Printer-Applicators

- MODELS: 5410 Mini Label Printer-Applicator (Zebra 110 Xi4)  
 5410 Standard Label Printer-Applicator (Zebra 110 Xi4)  
 5440 Standard Label Printer-Applicator (Zebra 140 Xi4)  
 5470 Standard Label Printer-Applicator (Zebra 170 Xi4)  
 5422 Standard Label Printer-Applicator (Zebra 220 Xi4)



| Printer Details  | 5410 Mini   | 5410 Std.                      | 5440  | 5470  | 5422   |
|--|---|--------------------------------|---|---|--|
| Method   | Thermal Transfer or Direct Thermal                        |                                |   |   |  |
| Resolution   | 203, 300, 600 dpi   |                                | 203 or 300 dpi  |   |  |
| Max. Print Speed   | 10/8/4 ips<br>(254/203/102 mmps)                          |                                | 10 ips (254 mmps)                                       |   |  |
| Max. Print Length  | 39" (991 mm)  |                                |   |   |  |
| Label Liner Min.   | .79" (20 mm)  |                                | 1.57"<br>(40 mm)  | 2"<br>(51 mm )  | 4.25"<br>(108 mm)                                      |
| Label Liner Max.   | 4.5" (114 mm)   |                                | 5.51"<br>(150 mm)                                       | 7.1"<br>(180 mm)  | 8.8"<br>(223.5 mm)                                     |
| Size   | 18"H X 13.6"D x 18"W<br>(457 x 345 x 457 mm)              |                                | 18"H x<br>14.4" D x<br>26" W<br>(457 x 365<br>x 660 mm) | 18"H x<br>16.4" D x<br>26" W<br>(457 x 417<br>x 660 mm) | 18"H x<br>18.5"D x<br>26" W<br>(457 x 470<br>x 660 mm) |
| Weight   | 56 lbs<br>(25.4 kg)                                       | 101 lbs<br>(45 kg)             | 105 lbs<br>(48 kg)                                      | 109 lbs<br>(49.4 kg)                                    | 115 lbs<br>(52 kg)                                     |
| <b>Label Roll Size</b>   |   |                                |   |   |  |
| Max. Roll OD   | 10"<br>(254 mm)   | 16" (406 mm)                   |   |   |  |
| ID/Core Sizes  | 3"<br>(76 mm)   | 3", 5" or 6" (76, 127, 152 mm) |   |   |  |
| <b>Operating Environment</b>   |   |                                |   |   |  |
| Power Supply   | Universal w/power-factor correction 90V-264V AC, 48-62 Hz |                                |   |   |  |
| Air  | 80-100 psi  |                                |   |   |  |
| Temperature  | 40° - 104° F (5° - 40° C)                                 |                                |   |   |  |
| Relative Humidity  | Max. 95% non-condensing                                   |                                |   |   |  |
| <b>Applicator Options</b>  |   |                                |   |   |  |
| Swing-Away Cylinder (standard), rotary actuator, Repeater™ two-panel, Sidewinder™ wrap-around, tamp, tamp-blow, blow-on, gimbal pad, custom application methods  |   |                                |   |   |  |
| <b>Interfacing Capabilities</b>  |   |                                |   |   |  |
| <ul style="list-style-type: none"> <li>Flash Memory (4 MB, 2MB available to user) and SDRAM (16 MB, 12 MB available)</li> <li>High-speed bi-directional IEEE 1284 parallel interface • USB 2.0 Port (480 MBps)</li> <li>High-speed serial interfaces: RS232C/422/485 multi-drop (optional adapter)</li> <li>ZebraNet™ Wireless 10/1000 and PrintServerII Print Servers • IBM Twinax, Coax</li> </ul> |   |                                |   |   |  |
| <b>Bar Code Symbologies</b>  |   |                                |   |   |  |
| All major linear and 2D symbologies including QR, Datamatrix, Aztec, & MicroPDF  |   |                                |   |   |  |
| <b>Options &amp; Accessories</b>   |   |                                |   |   |  |
| <ul style="list-style-type: none"> <li>Compact Flash Cards • XML Enabled Printing • 64 MB On-board Linear Flash Memory</li> <li>Firmware support for downloadable TrueType™; additional fonts available • RFID</li> </ul>  |   |                                |   |   |  |

Shipping Containers

Electronics

Pallets

Books

Totes

Soft Packaging

Food & Beverage

Specifications subject to change without notice.



**FOX IV TECHNOLOGIES, INC.**

6011 ENTERPRISE DRIVE, EXPORT, PA 15632 | PHONE: 1.724.387.3500 | FAX: 1.724.387.3516

VISIT US ONLINE AT [WWW.FOXIV.COM](http://WWW.FOXIV.COM)



Leading companies.  
Leading solutions.