





SlowStop® Handicap Parking Bollard (4" Diameter)

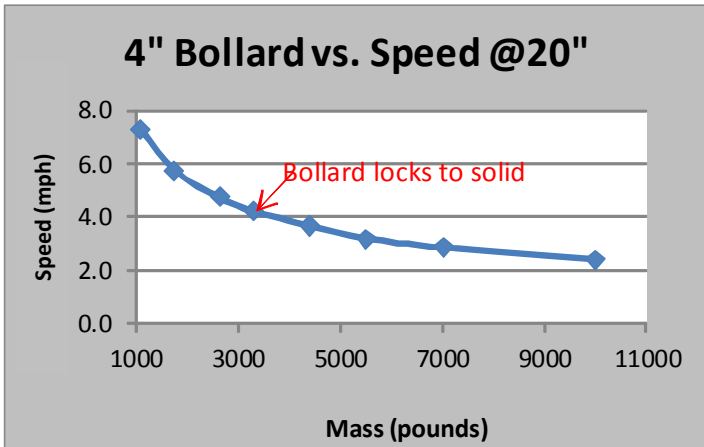

Installs with four (4)
5/8" x 5-1/2"
Concrete Anchor Screws



Color: Standard Yellow Bollard on Black Base

Diameter: 4" (3.5" ANSI Schedule 40)

Bollard Height: 42"

Sign Height: 60" above ground (ADA)

Set Screws: 5 M16 x 2.00
8mm Hex

Fill: Concrete pour by customer

SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally friendly water-based KTL coating.
- HDPE sign on engineer grade sheeting
- Aluminum post and brackets included

RECOMMENDED USES

- Parking lot handicap parking spots
- Sign face can be changed for alternate uses
- Post-tensioned Concrete
- For use without costly wheel stops
- Avoid trip hazards in pedestrian travel lanes

