

XIV. AN EXPERIMENTAL STUDY OF THE IMPACT OF WAREHOUSE PARAMETERS ON THE DESIGN OF A CASE-PICKING WAREHOUSE

Russell D. Meller
University of Arkansas and Fortna Inc.

Lisa M. Thomas
University of Arkansas and Fortna Inc.

Abstract

The best design for a warehouse is based on its ability to meet the demands placed on the warehouse, which are typically characterized by warehouse parameters like the order profile, inventory requirements, etc. Consequently, these parameters should be considered in the design process. In this paper we characterize the design of a case-picking warehouse with five design variables and identify the warehouse parameters that have the greatest impact in setting the values of these variables. With our analysis, the search for the optimal design can be reduced by limiting the design space considered.

1. Introduction

One challenging aspect of warehouse design is that the demands placed on warehouses vary. For example, some warehouse are expected to accommodate a highly skewed demand profile (a very small percentage of the products account for a very high percentage of demand) and others a demand profile that is not highly skewed, or accommodating very little inventory of each product in one warehouse and a lot of inventory in another. These varying warehouse demands, which we refer to as warehouse parameters, ultimately lead to different designs. And as a warehouse design is the combination of a set of warehouse design variables, it is possible to measure the impact of the warehouse parameter values on the warehouse design values. Thus, the purpose of this paper is to first identify the parameters that have the greatest impact on the best warehouse design and then to illustrate how these parameters can be used to limit the solution space for the best warehouse design.

We focus on a manual, case-picking warehouse that entails picking from pallet rack, where the bottom level of pallet rack serves as a forward area for picking fast-moving cases, and the upper levels are comprised of reserve storage locations. We

assume that any items that do not have a forward location are picked from reserve storage. The design variables that we consider include the number of levels of pallet rack, the shape of the pallet area, the dock door configuration, as well as the size and layout of the forward area, if a forward area is warranted. We consider random storage in the forward area, as well as two class-based storage layouts. In order to evaluate design performance, we use a pallet-area sizing algorithm and analytical models for putaway, order picking and replenishment operations based on our previous research [8, 11].

The warehouse parameters that we consider include the number of SKUs and pallet locations, the number of cases per pallet, the number of picks per line, the number of lines per batch, and demand skewness. We evaluate these parameters over a wide range of design variables and use complete enumeration to determine the best design.

2. Literature Review

A forward picking area generally includes smaller quantities of fast-moving products in order to improve picking productivity, as picking occurs over a smaller area. The tradeoff is that picking from a forward area results in an added cost of replenishment from reserve storage. In addition, as more items are placed in the forward area, productivity decreases. Thus, the forward-reserve problem entails determining the number and quantity of items that should be placed in the forward area to minimize the overall picking and replenishment time. Bozer [3] considered a configuration with a co-located forward area, where the bottom level of pallet rack serves as the forward area, and the upper levels include the reserve storage locations. This configuration is conducive to a case-picking operation where cases are received in pallet quantities, as no additional storage space is needed for the forward area.

Frazelle et al. [5] developed a procedure for determining the best size of the forward area, as well as the quantity of items to include based on input data including the activity profile, pick and replenishment productivity, and occupancy index. In the procedure, clusters of SKUs that are typically ordered together are considered. This methodology resulted in a 40% decrease in annual operating costs in a case study, as compared to the current policy of including all SKUs (in equal quantities) in a forward area with bin shelving and flow rack.

van den Berg et al. [12] consider a forward area where order picking is performed during a busy period, and replenishments occur during a preceding idle period. In this paper, replenishments are deferred until after the busy picking period by placing more than one unit load in the forward area. The authors present heuristics to determine the items that should have more than one unit load in the forward area in order to minimize extra replenishment labor during picking, so as to increase throughput.

Bartholdi and Hackman [1] consider storage units in less-than-pallet quantities as in a distribution center that stocks small parts. The authors showed that storing the

same amount of space for each SKU is equivalent to storing an equal time supply for each SKU. In addition, the authors showed that a three to six percent reduction in restocks can be achieved by changing from equal space-time allocations to optimal allocations that use the mean lead-time demand and safety stock information to re-allocate space in the forward area.

Bartholdi and Hackman [2] developed a model for case picking from a forward area within bottom-level pallet locations. The model determines the number of locations to allocate to each SKU such that the maximum benefit is achieved from the forward area. In this model, the labor savings per pick in the forward area is fixed and independent of the size of the forward area.

Another decision variable is the number of pallet rack levels; higher levels of pallet rack minimize the footprint of the pallet area, but higher levels also entail more vertical travel that is generally slower than horizontal travel. Parikh and Meller [9] considered the optimal height of a single-deep pallet rack storage system that employs order-picking trucks with both Tchebychev and rectilinear travel. They presented a model to determine the number, length and height of storage aisles needed to meet storage and throughput requirements. The authors concluded that the optimal storage height decreases for a system with a high throughput requirement, but increases as the cost of storage space increases.

Pallet area shape is another design decision that involves determining the optimal width-to-depth ratio of the pallet rack area. Francis [4] modeled the expected travel in a random storage warehouse for unit-load retrievals with a single pickup and deposit (P&D) point. For this configuration, the optimal width-to-depth ratio of the storage area is two-to-one. Thomas and Meller [11] show that for multiple pickup and deposit points (i.e., a uniform distribution of dock doors), a three-to-two shape ratio is optimal for single stops. Hall [6] developed models for order picking in a random storage warehouse and determined that the optimal shape of the pallet area increases (with more aisles that are less deep) as the number of pick lines per tour increases.

3. Methodology

To conceptualize designs, we utilize the Functional Flow Network (FFN) as first introduced by McGinnis et al. [7]. A FFN is a series of nodes and arcs, where nodes represent the functional areas of the warehouse, and arcs denote the flow of product from one functional area to another. For a case-picking warehouse, we consider the two FFNs illustrated in Figure 1, where the Figure 1(a) denotes pallet rack for picking cases with no forward area, and Figure 1(b) includes a co-located forward area on the bottom level of pallet rack for picking fast-moving cases.

In our analysis, we assume that cases are received in pallet quantities, and we use an average number of cases per pallet to estimate the number of pallet put aways. Cases are picked and loaded onto pallets, such that the case quantity per order-picking tour is 80 percent of the number of cases on incoming pallets. The number of lines

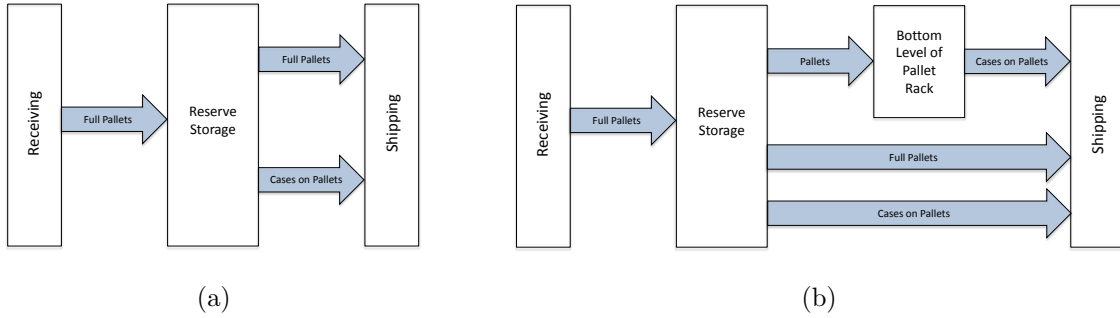


Figure 1: Functional Flow Networks: (a) Basic FFN with all picks from reserve storage; (b) FFN including a co-located forward area with case picks from the forward area (bottom level), pallet and case picks from the reserve area, and with replenishments in pallet quantities from the reserve area to the forward area.

per order-picking tour is calculated by dividing the pallet capacity (in cases) by the average number of picks per line.

To assess design performance, we use a pallet-area sizing algorithm [8] along with analytical models [11] to quantify the space and labor requirements for a given design. We consider a large range of designs, with every possible combination of design variables: forward area layout and size, pallet area shape and pallet rack levels. The exact values considered for these variables are listed in Table 1.

Table 1: Designs Considered

| Design Variable | Values Considered |
|---------------------------------------|---|
| Random Forward-Area SKUs | 0%, 5%, 10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, 90%, 100% |
| 1-Sided Class-Based Forward Area SKUs | 20%, 30%, 40%, 50%, 60%, 70%, 80%, 90%, 100% |
| 2-Sided Class-Based Forward Area SKUs | 20%, 30%, 40%, 50%, 60%, 70%, 80%, 90%, 100% |
| Pallet Area Shapes | 0.5, 1.0, 1.5, 2.0, 3.0, 4.0, 5.0, 6.0, 7.0 |
| Level of Pallet Rack | 4, 5, 6 |

Using the 20 data sets in Table 2, we calculate correlation coefficients between the warehouse parameters and the design variable of forward area size that results in the least labor hours. We focus first on the forward area size, as this variable can have a significant impact on design performance [10]. (The variable for pallet area height was set at 6 levels because, as we show later, designs with higher levels of pallet rack result in lower labor hours than lower levels of pallet rack in most cases.) Table 3 lists the correlation coefficients for each warehouse parameter with the optimal forward area size for each layout.

Table 2: Data Sets Based on Order Data

| Data Set | Pallet locns | SKUs | Incoming cases per pallet | Case picks per day | Avg picks per line | Skewness | |
|----------|--------------|--------|---------------------------|--------------------|--------------------|----------|--------------|
| | | | | | | A | %Lines/%SKUs |
| DS1 | 60,000 | 5,286 | 96.0 | 389,396 | 11.65 | 0.097 | 65/20 |
| DS2 | 24,000 | 10,831 | 12.7 | 4,293 | 1.50 | 0.071 | 77/20 |
| DS3 | 23,600 | 10,612 | 10.6 | 3,384 | 1.28 | 0.079 | 75/20 |
| DS4 | 14,000 | 5,493 | 11.8 | 2,401 | 1.19 | 0.053 | 81/20 |
| DS5 | 8,650 | 5,574 | 12.5 | 1,251 | 1.29 | 0.122 | 68/20 |
| DS6 | 35,000 | 8,539 | 48 | 44,097 | 3.69 | 0.024 | 92/20 |
| DS7 | 50,000 | 8,000 | 25 | 60,000 | 4.00 | 0.079 | 75/20 |
| DS8 | 45,000 | 6,000 | 30 | 45,000 | 1.50 | 0.071 | 77/20 |
| DS9 | 30,000 | 7,000 | 35 | 40,000 | 2.25 | 0.053 | 81/20 |
| DS10 | 10,000 | 4,000 | 20 | 11,000 | 4.50 | 0.122 | 68/20 |
| DS11 | 50,000 | 8,333 | 70 | 126,000 | 3.00 | 0.068 | 80/20 |
| DS12 | 40,000 | 6,700 | 100 | 160,000 | 8.00 | 0.253 | 55/20 |
| DS13 | 30,000 | 5,000 | 30 | 32,400 | 1.00 | 0.146 | 66/20 |
| DS14 | 10,000 | 6,000 | 15 | 6,600 | 3.00 | 0.096 | 74/20 |
| DS15 | 40,000 | 26,000 | 100 | 96,000 | 8.00 | 0.253 | 55/20 |
| DS16 | 30,000 | 25,000 | 80 | 76,800 | 1.00 | 0.107 | 72/20 |
| DS17 | 10,000 | 5,000 | 8 | 2,880 | 2.00 | 0.079 | 75/20 |
| DS18 | 20,000 | 6,000 | 30 | 21,600 | 1.50 | 0.097 | 65/20 |
| DS19 | 45,000 | 4,500 | 20 | 36,500 | 3.50 | 0.024 | 92/20 |
| DS20 | 5,000 | 500 | 15 | 2,400 | 1.00 | 0.117 | 71/20 |

Table 3: Correlation Coefficients of Warehouse Parameters with Forward Area Size

| Warehouse Parameter | Forward Area Layout | | |
|------------------------------|---------------------|---------|--------|
| | 1-Sided | 2-Sided | Random |
| Pallets | -0.138 | -0.176 | -0.062 |
| Cases per pallet | 0.216 | 0.218 | 0.010 |
| SKUs | -0.436 | -0.428 | -0.237 |
| Picks per line | -0.140 | -0.145 | 0.266 |
| Skewness | -0.357 | -0.306 | -0.069 |
| SKUs-to-bottom-level-pallets | -0.562 | -0.546 | -0.292 |
| Lines per batch | 0.295 | 0.308 | -0.094 |

From Table 3 we see that the most important factor in determining the size of the forward area is SKUs-to-bottom-level-pallets, as this factor has the highest absolute correlation with the size of the forward area. This ratio represents a comparison of the number of SKUs to bottom-level pallet locations and can be calculated from the second and third columns in Table 2, while considering the number of levels of pallet rack. A ratio of less than one indicates that there are enough bottom-level locations to allocate all SKUs a bottom-level, forward area location (if warranted). For values greater than 1.0, the footprint of the pallet area would have to grow in order to accommodate designs with all SKUs on the bottom level. This ratio has a negative correlation with the size of the forward area. It is more advantageous to have a smaller forward area with fewer SKUs than to have a larger footprint that can accommodate more SKUs.

The number of SKUs is also a significant factor. As the number of SKUs increases, the size of the forward area should decrease in order to achieve the maximum benefit from the forward area. The skewness factor has a slight negative correlation, especially for the class-based storage layouts. As the skewness of the ABC curve increases, less SKUs should be placed in the forward area. The lines per batch has a slight positive correlation with the size of the forward area for class-based storage.

Next, we consider the correlation of the optimal shape of the pallet area with the type of layout (i.e., 1-sided class-based layout, 2-sided class-based layout and random forward area layout). The shape factor represents the width-to-depth ratio of the warehouse, where higher ratios indicate more elongated warehouses with aisles that are less deep. A correlation coefficient of 0.381 was calculated for pallet area shape and layout type, indicating a slight correlation between these two factors. From our previous investigation of warehouse shape (see [11]), the 1-sided class-based layout performs best for lower shapes as compared to the 2-sided class-based layout and random storage layout. However, in our previous research we assumed that the class-based layouts comprised the entire pallet area. When the class-based forward area includes only a portion of the pallet rack aisles, two shapes are involved: the shape of the entire pallet area (that includes picks from reserve storage) and the shape of the smaller forward area (that includes picks from the centermost, bottom-level pallet locations). Thus, the (smaller) shape of the forward area depends on how many SKUs are assigned to the forward area. Further, previous research shows that the optimal shape of the picking area varies by operation (when considering pallet put-aways, order picking, and replenishment operations). Consequently, determining the optimal shape is not straightforward.

In our next analysis, we consider each data set from Table 2 and the performance of each data set for each design (by enumerating over all possible values for the design variables). Hence, we evaluate the data sets to determine any trends in design performance associated with the parameters of the warehouse. In other words, if certain designs perform well for a given range of warehouse parameters, then generalizations can be made about the preferred design for the range of (fixed) warehouse parame-

ters. In order to be thorough in our analysis, we also vary the warehouse parameters for each of the 20 data sets to determine their impact on design performance.

3.1 Forward Area Layout and Pallet Area Shape

Of the design variables considered, the forward area size and layout, as well as the shape of the pallet area have the greatest impact on travel times (see [11] and [10]). First we consider these variables for each of the data sets listed in Table 2. Tables 4–5 list pallet area shapes ranging from 0.5 to 7.0 for data sets 1 and 2, as well as the percent of SKUs in the forward area *that results in the least labor hours* for four layouts: no forward area, a forward area with random storage, a forward area with the 1-sided class-based layout, and a forward area with the 2-sided class-based layout. The daily hours listed in the tables total the travel times for put away, order picking and replenishment that meet the throughput requirements for each data set. The results for data sets 3–20 are listed in A.

Table 4: DS1 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 3223 | 30% | 2411 | 100% | 1662 | 50% | 2329 |
| 1.0 | 2554 | 20% | 1942 | 100% | 1342 | 50% | 1906 |
| 1.5 | 2403 | 30% | 1806 | 100% | 1272 | 50% | 1726 |
| 2.0 | 2271 | 30% | 1680 | 100% | 1214 | 40% | 1601 |
| 3.0 | 2212 | 40% | 1580 | 100% | 1208 | 50% | 1487 |
| 4.0 | 2180* | 40% | 1511 | 70% | 1203* | 70% | 1432 |
| 5.0 | 3205 | 40% | 1493 | 70% | 1211 | 50% | 1398 |
| 6.0 | 2196 | 50% | 1459* | 70% | 1212 | 50% | 1369* |
| 7.0 | 2268 | 40% | 1475 | 70% | 1251 | 50% | 1382 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 5: DS2 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 175 | 5% | 145 | 40% | 112 | 20% | 152 |
| 1.0 | 142 | 5% | 120 | 30% | 94 | 20% | 115 |
| 1.5 | 136 | 10% | 113 | 30% | 91 | 20% | 109 |
| 2.0 | 126 | 10% | 106 | 20% | 86 | 20% | 100 |
| 3.0 | 120* | 10% | 98 | 20% | 83* | 20% | 93 |
| 4.0 | 126 | 10% | 100 | 20% | 86 | 20% | 95 |
| 5.0 | 122 | 10% | 97* | 20% | 86 | 20% | 93 |
| 6.0 | 126 | 10% | 98 | 20% | 87 | 20% | 93 |
| 7.0 | 125 | 10% | 97* | 20% | 88 | 20% | 92* |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

From Tables 4–5 and Tables 18–35 in A we observe that, in general, the 1-sided layout outperforms the other layouts (lower total hours), followed by the 2-sided layout. Also, we observe that the percent of SKUs included in the forward area varies by the type of forward area as well.

Table 6 provides a summary for all twenty data sets, listing the best shape and forward area size for each of the three layouts. From this set of twenty examples and their associated skewness levels, a forward area is warranted in all the data sets. That is, the savings in order picking from the forward area outweighs the extra labor in replenishment, even for data sets 2–5, 14, 17 and 20, where the number of cases per pallet is relatively low (approximately 8–15). In addition, the impact of pallet-area shape is the greatest for shapes of 0.5–2.0, but shapes higher than 2.0 yield more similar results in terms of required labor hours. In general, pallet-area shapes of 3.0 or higher result in the least labor. The examples also reveal that the one-sided, class-based storage layouts perform best with more SKUs in the forward area as compared to the random-storage forward area layout. As more SKUs are included in the class-based layouts, they are generally assigned to less favorable locations (i.e., class-C locations). Consequently, although the total area increases, the location of the fastest-moving SKUs does not change. Thus, the performance of class-based storage layouts do not deteriorate by adding additional SKUs, except in those cases where adding more SKUs necessitates an increase in the footprint of the pallet area.

In comparing the results presented in Tables 4–5 and Tables 18–35 in A, most of the data sets result in the least labor with $\sim 10\%$ of the SKUs in the random storage forward area, $\sim 20\text{--}30\%$ of the SKUs in the one-sided, class-based layout, and $\sim 10\text{--}20\%$ in the two-sided, class based layout. However, the data sets with a low SKUs-to-bottom-level-pallets ratio (≤ 1.0) performs best with a higher percentages of SKUs in the forward area compared to the others. Thus, further investigation is

necessary in order to determine the impact of this parameter on the best design.

Table 6: Summary of Best Shape and Forward Area Size¹

| Warehouse | Random | | 1-Sided | | 2-Sided | |
|-----------|------------|------|------------|------|------------|------|
| | Best Shape | SKUs | Best Shape | SKUs | Best Shape | SKUs |
| DS1 | 6.0 | 50% | 4.0 | 70% | 6.0 | 50% |
| DS2 | 3.0 | 10% | 3.0 | 20% | 3.0 | 20% |
| DS3 | 3.0 | 10% | 3.0 | 20% | 3.0 | 20% |
| DS4 | 3.0 | 10% | 3.0 | 20% | 3.0 | 20% |
| DS5 | 3.0 | 10% | 3.0 | 20% | 3.0 | 20% |
| DS6 | 3.0 | 10% | 3.0 | 30% | 6.0 | 20% |
| DS7 | 6.0 | 20% | 3.0 | 30% | 6.0 | 20% |
| DS8 | 6.0 | 30% | 3.0 | 90% | 6.0 | 40% |
| DS9 | 6.0 | 20% | 4.0 | 30% | 6.0 | 20% |
| DS10 | 4.0 | 10% | 3.0 | 20% | 3.0 | 20% |
| DS11 | 6.0 | 20% | 6.0 | 50% | 6.0 | 20% |
| DS12 | 6.0 | 30% | 6.0 | 50% | 6.0 | 40% |
| DS13 | 6.0 | 30% | 6.0 | 60% | 6.0 | 50% |
| DS14 | 4.0 | 5% | 2.0 | 20% | 4.0 | 20% |
| DS15 | 5.0 | 10% | 5.0 | 20% | 6.0 | 10% |
| DS16 | 6.0 | 10% | 6.0 | 20% | 6.0 | 20% |
| DS17 | 4.0 | 10% | 2.0 | 10% | 5.0 | 10% |
| DS18 | 6.0 | 30% | 4.0 | 40% | 6.0 | 20% |
| DS19 | 4.0 | 10% | 3.0 | 40% | 6.0 | 20% |
| DS20 | 4.0 | 40% | 3.0 | 70% | 3.0 | 90% |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

3.2 SKUs to Bottom-Level Pallets

In considering the impact of the SKUs-to-bottom-level-pallets ratio, data sets 1, 8 and 19–20 have SKUs-to-bottom-level-pallets ratios of less than 1.0, and data sets 7 and 11–13 have ratios of 1.0. The remaining data sets have ratios higher than 1.0. To determine if this ratio affects the optimal number of SKUs in the forward area, this ratio is adjusted (by varying the number of pallet locations). Table 7 lists the optimal percentage of SKUs in the random-storage forward area, and Tables 8 and 9 list the optimal percentage of SKUs in the forward areas for the 1-sided and 2-sided class-based storage layouts for a range of SKUs-to-bottom-level-pallets ratios. (Again, we fix the number of pallet levels to 6 and the pallet area shape to 3.0, as these values generally perform well as compared to other values for these variables.)

Table 7: Optimal SKUs in Random Forward Area¹

| Example | SKUs-to-bottom-pallets | | | | | |
|---------|------------------------|--------|--------|--------|-------|-------|
| | 0.3 | 0.5 | 1.0 | 2.0 | 3.0 | 4.0 |
| DS1 | 50% | 40% | 30% | 20% | 20% | 20% |
| DS2 | 20-40% | 20-30% | 20% | 10-20% | 10% | 5-10% |
| DS3 | 20% | 20% | 10-20% | 10% | 10% | 10% |
| DS4 | 20% | 10-20% | 10-20% | 10-20% | 10% | 5-10% |
| DS5 | 20-40% | 20-50% | 20-40% | 10-20% | 5-20% | 10% |
| DS6 | 10% | 10% | 10% | 5% | 5% | 5% |
| DS7 | 10% | 10% | 10% | 10% | 5% | 5% |
| DS8 | 30% | 30% | 20% | 20% | 20% | 20% |
| DS9 | 20% | 20% | 20% | 20% | 10% | 10% |
| DS10 | 30% | 20% | 20% | 20% | 20% | 20% |
| DS11 | 20% | 20% | 20% | 20% | 20% | 20% |
| DS12 | 40% | 40% | 30% | 20% | 20% | 20% |
| DS13 | 30% | 30% | 30% | 20% | 20% | 20% |
| DS14 | 30% | 20-30% | 10-20% | 10% | 10% | 50% |
| DS15 | 30% | 30% | 20% | 20% | 10% | 10% |
| DS16 | 30% | 20% | 20% | 20% | 10% | 10% |
| DS17 | 20-30% | 20-30% | 10-20% | 10% | 5-10% | 5-10% |
| DS18 | 30% | 30% | 40% | 30% | 20% | 20% |
| DS19 | 10% | 10% | 10% | 10% | 10% | 10% |
| DS20 | 40% | 30% | 40% | 30% | 30% | 30% |

¹ Results assume 6 pallet levels and a pallet area shape of 3.0.

Table 8: Optimal SKUs in 1-Sided, Class-Based Forward Area¹

| Example | SKUs-to-bottom-pallets | | | | | |
|---------|------------------------|---------|---------|--------|--------|--------|
| | 0.3 | 0.5 | 1.0 | 2.0 | 3.0 | 4.0 |
| DS1 | 100% | 100% | 70% | 40% | 20% | 20% |
| DS2 | 80-100% | 70-80% | 40-50% | 20-30% | 20% | 10-20% |
| DS3 | 90-100% | 70% | 40-50% | 20% | 20% | 10-20% |
| DS4 | 80-100% | 50-80% | 30-60% | 20-30% | 20% | 20% |
| DS5 | 80-100% | 60-100% | 40-70% | 20-40% | 20% | 20% |
| DS6 | 50% | 50% | 40% | 30% | 30% | 10% |
| DS7 | 90% | 70% | 30% | 20% | 20% | 20% |
| DS8 | 100% | 90% | 70% | 40% | 30% | 20% |
| DS9 | 90% | 80% | 50% | 30% | 20% | 20% |
| DS10 | 70% | 60% | 20% | 20% | 20% | 20% |
| DS11 | 100% | 100% | 60% | 40% | 20% | 20% |
| DS12 | 90% | 90% | 60% | 40% | 30% | 20% |
| DS13 | 100% | 100% | 90-100% | 50% | 30% | 30% |
| DS14 | 60-100% | 50-70% | 30-40% | 20% | 20% | 10% |
| DS15 | 90% | 90% | 60% | 30% | 30% | 20% |
| DS16 | 100% | 100% | 100% | 50% | 30% | 20% |
| DS17 | 60-90% | 50-60% | 30-40% | 20% | 10-20% | 10% |
| DS18 | 100% | 100% | 70% | 40% | 40% | 20% |
| DS19 | 60% | 60% | 30% | 20% | 20% | 10% |
| DS20 | 100% | 100% | 60% | 40% | 40% | 40% |

¹ Results assume 6 pallet levels and a pallet area shape of 3.0.

Table 9: Optimal SKUs in 2-Sided, Class-Based Forward Area¹

| Example | SKUs-to-bottom-pallets | | | | | |
|---------|------------------------|--------|--------|-----|--------|--------|
| | 0.3 | 0.5 | 1.0 | 2.0 | 3.0 | 4.0 |
| DS1 | 70% | 50% | 20% | 20% | 20% | 20% |
| DS2 | 20% | 50% | 20-40% | 20% | 10-20% | 10-20% |
| DS3 | 20% | 30% | 20-30% | 20% | 10-20% | 10-20% |
| DS4 | 40% | 20-30% | 20-30% | 20% | 20% | 20% |
| DS5 | 60% | 50-60% | 20% | 20% | 20% | 20% |
| DS6 | 20% | 30% | 30% | 20% | 20% | 20% |
| DS7 | 40% | 30% | 20% | 20% | 20% | 20% |
| DS8 | 60% | 50% | 40% | 30% | 20% | 20% |
| DS9 | 40% | 30% | 30% | 20% | 20% | 20% |
| DS10 | 30% | 20% | 20% | 20% | 20% | 20% |
| DS11 | 40% | 20% | 20% | 20% | 20% | 20% |
| DS12 | 60% | 60% | 30% | 30% | 20% | 20% |
| DS13 | 90% | 50% | 40% | 40% | 30% | 20% |
| DS14 | 40% | 20-30% | 20% | 20% | 20% | 20% |
| DS15 | 60% | 50% | 30% | 20% | 20% | 10% |
| DS16 | 50% | 30% | 20% | 20% | 20% | 20% |
| DS17 | 30% | 20% | 20% | 20% | 20% | 20% |
| DS18 | 80% | 50% | 20% | 20% | 20% | 20% |
| DS19 | 30% | 20% | 20% | 20% | 20% | 10% |
| DS20 | 100% | 70% | 60% | 40% | 30% | 30% |

¹ Results assume 6 pallet levels and a pallet area shape of 3.0.

Again, a SKUs-to-bottom-level-pallets ratio of 1.0 or less implies that all of the SKUs can be located in bottom-level pallet positions, and values greater than 1.0 indicate that the footprint of the pallet area would have to grow in order to accommodate all SKUs on the bottom level. Thus, in moving from left to right in Tables 7–9, it is not surprising that the optimal number of forward SKUs decreases as the number of available bottom-level locations decreases. When there are few SKUs compared to bottom-level pallets, intuitively, more SKUs should be placed in the forward area to minimize travel. Also, note that the 1-sided forward area layout performs best with significantly more SKUs in the forward area for SKUs-to-bottom-level-pallets ratios of 1.0 or less as compared to the random storage and 2-sided forward area layouts.

3.3 Demand Skewness

Next, we consider the effect of demand skewness on the optimal size of the forward area. We evaluate the example data sets using three levels of demand skewness as depicted in Figure 2: average skewness (80/20, such that 20% of the items represent 80% of the demand), moderately skewed (60%/20%), and hardly skewed (40%/20%).

In comparing the percent of SKUs in the forward area across all data sets, we assume that the number of pallet positions is such that all SKUs can have a bottom-level location (with the number of bottom-level locations approximately equal to the number of SKUs).

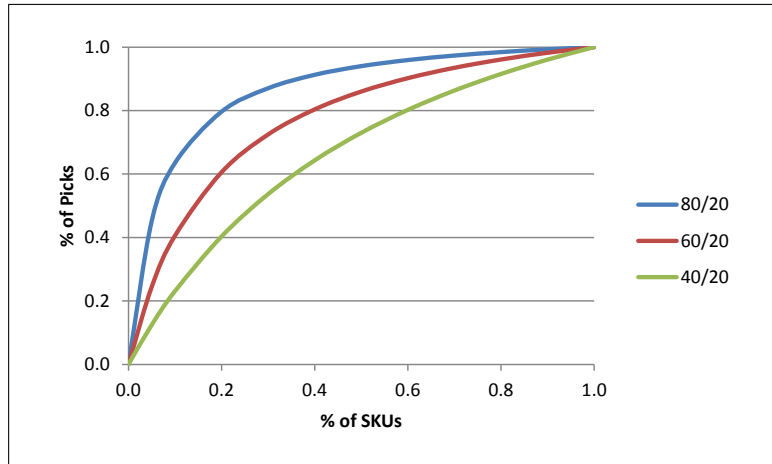


Figure 2: Demand skewness levels.

The results for the example data sets are listed in Tables 10–12, with the forward area size that results in the least amount of travel for each layout.

In general, the optimal forward area size increases as the skewness decreases, as indicated in Tables 10–12. For an ABC curve with average skewness, the optimal percentage of SKUs in the random storage forward area is approximately 20%; a moderately skewed curve prefers 20–40% of the SKUs, and the hardly skewed curve performs well with 40–70% of the SKUs in the forward area.

Again, the 1-sided layout in Table 11 outperforms the other layouts. The curve with an average skewness results in the least travel for approximately 40–50% of the SKUs in the forward area; the moderately skewed curve performs well with about 60% of the SKUs, and the hardly skewed curve performs best with 60% or more of the SKUs in the forward area.

For the 2-sided forward area layout, the curve with an average skewness performs well with 20% of the SKUs; the moderately skewed curve prefers about 40–60% of the SKUs, and the hardly skewed curve performs the best with around 40–80% of the SKUs in the forward area. Note that for a hardly skewed curve, the random storage forward area and 2-sided forward area have similar performance, especially for the data sets with a lower throughput requirement. Thus, for lower demand skewness, the random storage forward layout may be preferred for a doors-on-two-sides configuration, as random storage is generally easier to maintain than class-based storage.

Table 10: Random Forward Area Sizes for Different Skewness Levels¹

| Example | No Forward Area | Random Forward Area | | | | | |
|---------|-----------------|---------------------|-------|--------|-------|--------|-------|
| | | 80/20 | | 60/20 | | 40/20 | |
| | | % SKUs | Hours | % SKUs | Hours | % SKUs | Hours |
| DS1 | 1695 | 20% | 1164 | 20-30% | 1309 | 40-50% | 1406 |
| DS2 | 182 | 20% | 138 | 30% | 155 | 50-60% | 169 |
| DS3 | 169 | 20% | 127 | 30% | 139 | 30-50% | 150 |
| DS4 | 93 | 20% | 63 | 20-30% | 70 | 40% | 75 |
| DS5 | 45 | 20% | 31 | 20-30% | 35 | 40-70% | 38 |
| DS6 | 473 | 10% | 332 | 20% | 373 | 30% | 400 |
| DS7 | 961 | 20% | 731 | 20% | 786 | 30% | 832 |
| DS8 | 1178 | 20% | 659 | 40% | 782 | 70% | 859 |
| DS9 | 686 | 20% | 520 | 40% | 607 | 80% | 660 |
| DS10 | 104 | 20% | 87 | 20% | 96 | 20% | 105 |
| DS11 | 1554 | 20% | 858 | 20% | 1025 | 40% | 1146 |
| DS12 | 886 | 10% | 575 | 30% | 652 | 40% | 708 |
| DS13 | 971 | 20% | 477 | 30% | 575 | 50-60% | 650 |
| DS14 | 103 | 10% | 87 | 20% | 92 | 20% | 96 |
| DS15 | 921 | 10% | 675 | 20% | 746 | 30% | 796 |
| DS16 | 3510 | 20% | 1745 | 20% | 2168 | 40% | 2512 |
| DS17 | 98 | 20% | 78 | 20-30% | 83 | 30-40% | 87 |
| DS18 | 544 | 20% | 323 | 30% | 374 | 40-50% | 409 |
| DS19 | 699 | 20% | 492 | 30% | 537 | 40% | 575 |
| DS20 | 48 | 20% | 21 | 40% | 24 | 70% | 26 |

¹ Results assume 6 pallet levels, a pallet area shape of 3.0, and a SKUs-to-bottom-level-pallets ratio of 1.0.

Table 11: 1-Sided Forward Area Sizes for Different Skewness Levels¹

| Example | No Forward Area | 1-Sided Forward Area | | | | | |
|---------|-----------------|----------------------|-------|--------|-------|---------|-------|
| | | 80/20 | | 60/20 | | 40/20 | |
| | | % SKUs | Hours | % SKUs | Hours | % SKUs | Hours |
| DS1 | 1695 | 40% | 931 | 60% | 1124 | 50% | 1295 |
| DS2 | 182 | 50% | 105 | 60% | 127 | 60-90% | 149 |
| DS3 | 169 | 40-50% | 98 | 60% | 117 | 60-70% | 136 |
| DS4 | 93 | 40-50% | 50 | 60% | 59 | 60-90% | 69 |
| DS5 | 45 | 40-50% | 24 | 60-70% | 29 | 60-100% | 34 |
| DS6 | 473 | 40% | 269 | 40% | 325 | 40% | 375 |
| DS7 | 961 | 40% | 545 | 60% | 637 | 60% | 720 |
| DS8 | 1178 | 50% | 507 | 100% | 602 | 100% | 704 |
| DS9 | 686 | 50% | 391 | 90% | 479 | 100% | 558 |
| DS10 | 104 | 20% | 74 | 20% | 88 | 20% | 110 |
| DS11 | 1554 | 60% | 713 | 100% | 877 | 100% | 1049 |
| DS12 | 886 | 50% | 442 | 60% | 535 | 70% | 624 |
| DS13 | 971 | 60% | 390 | 100% | 480 | 100% | 576 |
| DS14 | 103 | 20% | 72 | 40% | 81 | 40% | 89 |
| DS15 | 921 | 50% | 496 | 60% | 603 | 60% | 703 |
| DS16 | 3510 | 100% | 1405 | 100% | 1819 | 100% | 2320 |
| DS17 | 98 | 40% | 62 | 40% | 71 | 40-50% | 79 |
| DS18 | 544 | 50% | 252 | 70% | 312 | 80% | 369 |
| DS19 | 699 | 40% | 388 | 60% | 461 | 60% | 526 |
| DS20 | 48 | 40% | 18 | 60% | 21 | 100% | 23 |

¹ Results assume 6 pallet levels, a pallet area shape of 3.0, and a SKUs-to-bottom-level-pallets ratio of 1.0.

Table 12: 2-Sided Forward Area Sizes for Different Skewness Levels¹

| Example | No Forward Area | 2-Sided Forward Area | | | | | |
|---------|-----------------|----------------------|-------|--------|-------|--------|-------|
| | | 80/20 | | 60/20 | | 40/20 | |
| | | % SKUs | Hours | % SKUs | Hours | % SKUs | Hours |
| DS1 | 1695 | 20% | 1084 | 40% | 1256 | 50% | 1382 |
| DS2 | 182 | 20% | 130 | 40% | 149 | 50-80% | 164 |
| DS3 | 169 | 20% | 119 | 40% | 135 | 40-50% | 148 |
| DS4 | 93 | 20% | 58 | 30-60% | 68 | 40-60% | 74 |
| DS5 | 45 | 20% | 29 | 30-70% | 34 | 50-80% | 37 |
| DS6 | 473 | 20% | 306 | 30% | 361 | 30% | 396 |
| DS7 | 961 | 20% | 678 | 30% | 768 | 40% | 824 |
| DS8 | 1178 | 40% | 601 | 60% | 738 | 100% | 821 |
| DS9 | 686 | 20% | 477 | 60% | 574 | 80% | 636 |
| DS10 | 104 | 20% | 83 | 20% | 95 | 20% | 105 |
| DS11 | 1554 | 30% | 768 | 40% | 977 | 40% | 1128 |
| DS12 | 886 | 20% | 529 | 40% | 630 | 40% | 698 |
| DS13 | 971 | 40% | 429 | 40% | 540 | 60% | 634 |
| DS14 | 103 | 20% | 84 | 20% | 91 | 20% | 95 |
| DS15 | 921 | 20% | 629 | 20% | 732 | 40% | 788 |
| DS16 | 3510 | 20% | 1600 | 40% | 2121 | 40% | 2482 |
| DS17 | 98 | 20% | 74 | 40% | 78 | 20-30% | 86 |
| DS18 | 544 | 20% | 292 | 40% | 356 | 50% | 402 |
| DS19 | 699 | 20% | 461 | 40% | 517 | 40% | 567 |
| DS20 | 48 | 40% | 18 | 60% | 22 | 70% | 25 |

¹ Results assume 6 pallet levels, a pallet area shape of 3.0, and a SKUs-to-bottom-level-pallets ratio of 1.0.

3.4 Cases Per Pallet

The number of cases per pallet, along with the number of picks per line, affect the number of replenishments. Next, we evaluate various combinations of cases-per-pallet and picks-per-line (average values) to determine if there are any situations where a forward area is not preferred. The number of cases per pallet for order picking is assumed to be approximately 80 percent of the number of cases on incoming pallets.

Table 13 lists the labor hours for an ABC curve with average skewness, and Table 14 lists results for a hardly skewed ABC curve for DS2 for various cases-per-pallet and picks-per-line combinations. (The travel-time model for the 2-sided, class-based layout requires at least three pick lines per tour, so travel times are blank for pick lines of less than three.)

As expected, the benefit of having a forward area is diminished as the number of picks per line is high relative to the capacity of the pallet, especially for a low ABC

Table 13: DS2 Labor Hours for an ABC Curve with Average Skewness

| Incoming cases/pallet | Picks/Line | Avg Lines | No Forward | Random Forward | 1-Sided Forward | 2-Sided Forward |
|-----------------------|------------|-----------|------------|----------------|-----------------|-----------------|
| 10 | 1 | 8 | 241 | 167 | 128 | 153 |
| 10 | 5 | 1.6 | 99 | 87 | 72 | – |
| 10 | 10 | 0.8 | 69 | 68 | 59 | – |
| 20 | 1 | 16 | 202 | 130 | 101 | 117 |
| 20 | 5 | 3.2 | 88 | 73 | 61 | 68 |
| 20 | 10 | 1.6 | 66 | 59 | 51 | – |
| 50 | 1 | 40 | 165 | 92 | 78 | 83 |
| 50 | 5 | 8 | 74 | 59 | 48 | 54 |
| 50 | 10 | 4 | 58 | 50 | 42 | 47 |

Table 14: DS2 Labor Hours for an ABC Curve with Low Skewness

| Incoming cases/pallet | Picks/Line | Avg Lines | No Forward | Random Forward | 1-Sided Forward | 2-Sided Forward |
|-----------------------|------------|-----------|------------|----------------|-----------------|-----------------|
| 10 | 1 | 8 | 241 | 198 | 176 | 196 |
| 10 | 5 | 1.6 | 99 | 94 | 88 | – |
| 10 | 10 | 0.8 | 69 | 69 | 66 | – |
| 20 | 1 | 16 | 202 | 160 | 143 | 157 |
| 20 | 5 | 3.2 | 88 | 80 | 75 | 79 |
| 20 | 10 | 1.6 | 66 | 63 | 60 | – |
| 50 | 1 | 40 | 165 | 120 | 110 | 117 |
| 50 | 5 | 8 | 74 | 65 | 60 | 64 |
| 50 | 10 | 4 | 58 | 54 | 49 | 53 |

curve skewness. Also, in situations where the savings of having a forward area is low, failure to choose the optimal percentage of SKUs in the forward area may actually result in higher labor for the forward area layouts as compared to a random storage layout with no forward area. However, if the number of bottom-level pallets is much greater than the number of bottom level SKUs, a forward area may be justified, even for a high number of picks per line. Note also that even though we only consider one pallet for each SKU in the forward area, including all of the reserve locations in the forward area for fast-moving SKUs that have a very high number of picks per line may be beneficial.

3.5 Pallet Rack Height

Finally, we investigate the variable for pallet rack height by evaluating the labor required for pallet rack levels of 4, 5, and 6. A pallet area shape of 3.0 is considered for the example data sets. The results for DS1 and DS2 are listed in Tables 15 and 16, and the remaining 18 examples are included in B.

For DS1 all of the SKUs can be accommodated on the bottom level of pallet rack for the three levels of pallet rack considered. Table 15 lists the labor required for the different levels of pallet rack for various percentages of SKUs in the forward area (note that the random storage layout with no forward area is included as 0% of the SKUs with the random storage forward area). For each layout in Table 15, the travel times decrease as the number of pallet levels increase. For this example data set, the decrease in the footprint of the pallet area results in labor savings that are more than the labor increases associated with the extra vertical travel for higher levels of pallet rack.

Table 15: DS1: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|------|------|----------------|------|------|----------------|------|------|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 2388 | 2300 | 2212 | – | – | – | – | – | – |
| 20 | 1785 | 1700 | 1647 | 1667 | 1591 | 1536 | 1677 | 1601 | 1540 |
| 40 | 1724 | 1654 | 1580 | 1462 | 1405 | 1346 | 1627 | 1563 | 1519 |
| 60 | 1766 | 1704 | 1619 | 1352 | 1312 | 1256 | 1625 | 1586 | 1507 |
| 80 | 1854 | 1765 | 1706 | 1287 | 1239 | 1217 | 1641 | 1587 | 1521 |
| 100 | 1936 | 1858 | 1792 | 1254 | 1225 | 1208 | 1659 | 1611 | 1541 |

For DS2 listed in Table 16, the labor hours decrease as the pallet rack height increases for forward areas that have 20% or less SKUs in the forward area. However, with 10,831 SKUs and at most 6,000 bottom-level locations (for 4 levels of pallet rack), not all SKUs can receive a bottom-level location without increasing the footprint of the warehouse. Thus, for more than 40% of the SKUs in the forward area, the travel

Table 16: DS2: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 127 | 127 | 120 | – | – | – | – | – | – |
| 20 | 107 | 107 | 101 | 86 | 86 | 83 | 99 | 99 | 93 |
| 40 | 120 | 119 | 118 | 90 | 91 | 92 | 106 | 105 | 105 |
| 60 | 138 | 139 | 141 | 100 | 102 | 104 | 118 | 120 | 122 |
| 80 | 160 | 161 | 163 | 111 | 113 | 114 | 134 | 136 | 137 |
| 100 | 177 | 178 | 180 | 119 | 121 | 122 | 145 | 146 | 148 |

times increase for higher levels of pallet rack due to the larger footprint of the pallet area.

From this analysis, a smaller pallet rack footprint (with higher levels of pallet rack) is preferred if all SKUs can be accommodated on the bottom level. Further, we observe that having less SKUs in the forward area is preferred to increasing the footprint of the warehouse in order to make room for more bottom-level SKUs.

4. Results

For our final analysis we generate 520 test data sets and determine the best design for each by enumerating over all possible designs. From the correlation coefficients for the optimal forward area size, three parameters that should be considered in sizing the forward area include: the SKUs-to-bottom-level pallets ratio, the ABC curve skewness, and the number of lines per batch. Recall also that the number of SKUs also resulted in a significant correlation; however, this parameter is embedded in the SKUs-to-bottom-level ratio parameter (that has a slightly higher correlation). In order to determine the range of parameters that are suitable for a given design, we classify the parameters into three ranges (high, medium and low) as shown in Table 17. The breakpoints for the classifications in Table 17 allow a categorization of data sets. The breakpoints were determined by first considering a more finite range for each parameter (using the 520 data sets) and then consolidating them in such a way that the consolidation did not result in an overlap of designs (as characterized by the best layout and forward area size). Nonetheless, in a few cases, even the more finite ranges considered included multiple designs. For example, the data sets with SKUs-to-bottom-pallets ratios ranging between 2.6 and 3.0, skewness levels of 50/20–55/20, and with lines per batch of 16–20, included two design types: a 1-sided layout with 30% of the SKUs (for three of the five data sets in this category) and a random storage forward area with 10% of the SKUs (for 2 of the data sets).

A three-letter sequence is used to categorize each of the 520 data sets, where the

Table 17: Parameter Levels

| Parameter | High Range | Medium Range | Low Range |
|----------------------------|------------|--------------|------------|
| SKUs-to-bottom-level ratio | 2.6–4.0 | 1.1–2.5 | ≤ 1.0 |
| ABC Skewness | 90–95 | 70–85 | 50–65 |
| Lines per batch | > 40 | 11–40 | 3–10 |

letter in the sequence denotes the level for the parameter (H–high, M–medium, and L–low) and the position of the letter indicates the parameter (position 1 = the SKUs-to-bottom-level ratio, position 2 = ABC skewness, and position 3 = number of Pick lines). For example, a sequence of “LHM” would indicate that the data set has a low SKUs-to-bottom-level-pallets ratio, a high ABC curve skewness, and a medium number of lines per batch.

For the 1-sided door configuration, 492 of the 520 data sets (95%) resulted in four dominant designs: a 1-sided forward area layout with 20% of the SKUs (11%), a 1-sided forward area layout with 30% of the SKUs (49%), a 1-sided forward area layout with 80% of the SKUs (13%), and a random storage layout with 10% of the SKUs (22%). The remaining 5% resulted in designs with a 1-sided layout with 40%, 50% and 60% of the SKUs in the forward area. Also worth noting, the 1-sided layout generally outperforms the 2-sided layout, as only six of the 520 data sets prefer the 2-sided layout when considering all of the forward area layouts. For each of the 27 ($3 \times 3 \times 3$) categories, we determine the distribution of data sets over each type of design (as characterized by the layout and forward area size). Figure 3 illustrates the distribution of these four designs for a 1-sided door configuration.

Notice that each of the faces of the cube represents a particular parameter sequence. For example, the designs that have a high SKUs-to-bottom-level-pallets ratio (three-letter sequence begins with “H”) are represented on the right face of the cube. All 27 sequences are represented with a sequence at each of the following locations along or within the cube:

- 8 corners,
- 12 edge midpoints,
- 6 face midpoints,
- 1 cube centerpoint (represented by sequence MMM).

The dominant designs for the parameter sequences are color coded, where 1S, 2S and R represent the 1-sided class-based layout, 2-sided class-based layout and random storage layout, and the percentage indicates the percent of SKUs that should be picked from the forward area within the bottom-level, centermost aisles. Based on the distribution of the designs in the cubes, particular parameter-range combinations yield

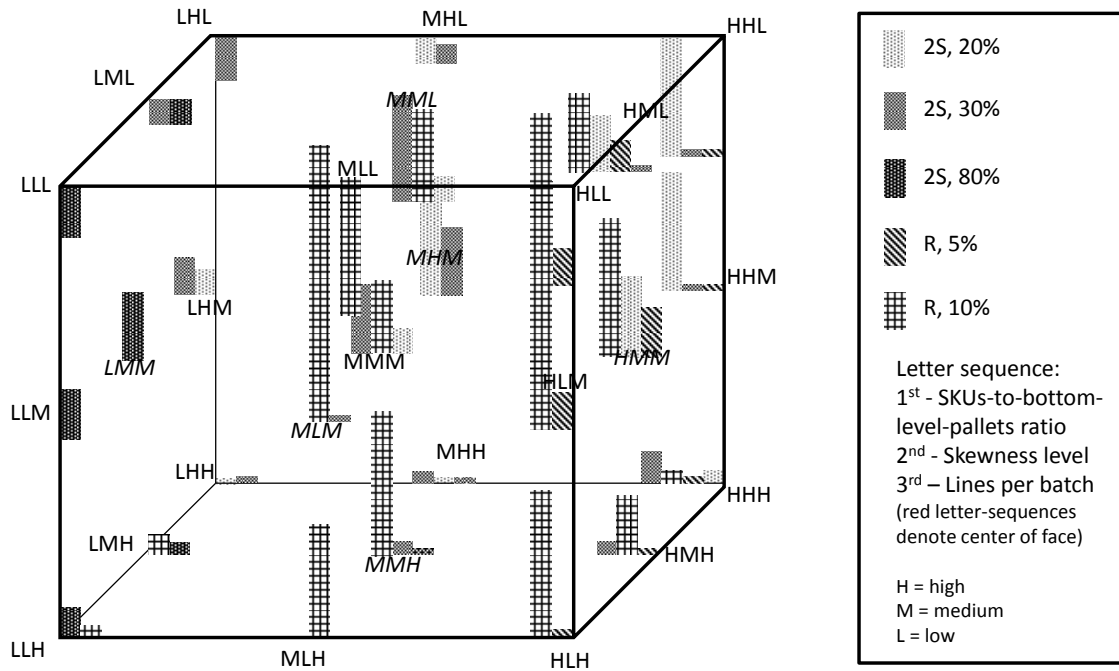


Figure 4: Parameter Levels and Optimal Designs for a 2-Sided Door Configuration

ratio. In general, unless the skewness level is high, data sets with low SKUs-to-bottom-level-pallets ratios and low-medium skewness levels (LL-, LML, and LMM) perform best with the 2-sided layout with 80% of the SKUs in the forward area. However, if the skewness is not low, a smaller 2-sided forward area layout is preferred with 30% of the SKUs. A 2-sided layout with 20% of the SKUs is desirable when both the SKUs-to-bottom-level-pallets ratio and skewness level are high, as long as the number of lines per batch is not high (HHL, HHM, MHM). When SKUs-to-bottom-level-pallets ratio is medium-high and the skewness level is medium to low (MM-, ML-, HM-, HL-), the random storage layout with 10% of the SKUs performs well. Also worth noting, even though the random forward area layout with 5% of the SKUs appears in the solution space for these data sets, the random forward area layout with 10% of the SKUs dominated the layouts with just 5% of the SKUs for the 507 data sets.

Our results indicate that warehouse parameters can be useful in predicting a design that will result in the best operational performance in terms of labor required for putaway, order picking and replenishment operations. Given the vast solution space associated with warehouse design, we feel that this research can benefit practitioners in pointing to an initial design that can then be further analyzed and optimized. In addition, our analysis can be used to gain insight into the impact of warehouse parameters on design performance.

A. Labor for Varying Shapes and Layouts (Data Sets 3–20)

Table 18: DS3 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 162 | 5% | 130 | 40% | 106 | 20% | 136 |
| 1.0 | 132 | 5% | 108 | 30% | 88 | 20% | 107 |
| 1.5 | 126 | 5% | 104 | 30% | 84 | 20% | 101 |
| 2.0 | 118 | 5% | 97 | 30% | 81 | 20% | 92 |
| 3.0 | 112* | 10% | 90 | 20% | 78* | 20% | 87 |
| 4.0 | 112* | 10% | 89* | 20% | 78* | 20% | 86 |
| 5.0 | 114 | 10% | 89* | 20% | 80 | 20% | 85* |
| 6.0 | 117 | 10% | 90 | 20% | 81 | 20% | 86 |
| 7.0 | 117 | 10% | 89* | 10% | 82 | 20% | 86 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 19: DS4 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 99 | 10% | 70 | 60% | 53 | 30% | 64 |
| 1.0 | 76 | 5% | 52 | 30% | 44 | 20% | 52 |
| 1.5 | 69 | 5% | 49 | 20% | 41 | 20% | 46 |
| 2.0 | 73 | 5% | 51 | 20% | 42 | 20% | 47 |
| 3.0 | 66* | 10% | 46 | 20% | 39* | 20% | 43 |
| 4.0 | 68 | 10% | 46 | 20% | 40 | 20% | 43 |
| 5.0 | 67 | 10% | 46 | 20% | 40 | 20% | 43 |
| 6.0 | 67 | 10% | 45* | 20% | 40 | 20% | 42* |
| 7.0 | 70 | 10% | 47 | 20% | 42 | 20% | 44 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 20: DS5 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 40 | 10% | 32 | 40% | 27 | 20% | 30 |
| 1.0 | 32 | 10% | 26 | 20% | 23 | 20% | 25 |
| 1.5 | 30 | 10% | 24 | 20% | 21 | 20% | 23 |
| 2.0 | 30 | 10% | 24 | 20% | 21 | 20% | 23 |
| 3.0 | 28* | 10% | 22* | 20% | 20* | 20% | 21* |
| 4.0 | 29 | 10% | 23 | 20% | 21 | 20% | 22 |
| 5.0 | 29 | 10% | 23 | 20% | 21 | 20% | 22 |
| 6.0 | 28* | 10% | 22* | 20% | 21 | 20% | 21* |
| 7.0 | 30 | 10% | 23 | 20% | 22 | 20% | 22 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 21: DS6 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 687 | 10% | 366 | 70% | 277 | 20% | 369 |
| 1.0 | 593 | 10% | 322 | 50% | 243 | 30% | 309 |
| 1.5 | 540 | 10% | 301 | 40% | 227 | 20% | 286 |
| 2.0 | 491 | 5% | 278 | 40% | 215 | 20% | 253 |
| 3.0 | 473 | 10% | 268 | 30% | 214* | 20% | 249 |
| 4.0 | 475 | 10% | 269 | 30% | 214* | 20% | 244 |
| 5.0 | 468* | 10% | 266* | 30% | 216 | 20% | 243 |
| 6.0 | 469 | 10% | 266* | 30% | 218 | 20% | 238* |
| 7.0 | 474 | 10% | 269 | 30% | 225 | 20% | 238* |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 22: DS7 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 1314 | 5% | 1083 | 100% | 674 | 30% | 1036 |
| 1.0 | 1083 | 5% | 865 | 70% | 601 | 20% | 830 |
| 1.5 | 1045 | 5% | 818 | 70% | 584 | 30% | 799 |
| 2.0 | 1004 | 10% | 797 | 50% | 569 | 20% | 757 |
| 3.0 | 961* | 10% | 743 | 30% | 556* | 20% | 688 |
| 4.0 | 969 | 20% | 730 | 30% | 563 | 30% | 683 |
| 5.0 | 998 | 20% | 729 | 30% | 572 | 30% | 675 |
| 6.0 | 1006 | 20% | 719* | 30% | 583 | 20% | 668* |
| 7.0 | 1023 | 20% | 724 | 30% | 595 | 20% | 670 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 23: DS8 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 1791 | 30% | 1069 | 100% | 745 | 70% | 956 |
| 1.0 | 1483 | 20% | 913 | 100% | 619 | 30% | 806 |
| 1.5 | 1045* | 20% | 825 | 90% | 569 | 40% | 729 |
| 2.0 | 1263 | 20% | 794 | 90% | 549 | 50% | 692 |
| 3.0 | 1178 | 20% | 750 | 90% | 538* | 40% | 645 |
| 4.0 | 1158 | 20% | 730 | 70% | 545 | 40% | 643 |
| 5.0 | 1164 | 20% | 728 | 70% | 554 | 30% | 632 |
| 6.0 | 1117 | 30% | 690* | 60% | 539 | 40% | 610* |
| 7.0 | 1148 | 30% | 700 | 60% | 552 | 40% | 614 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 24: DS9 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 912 | 10% | 622 | 70% | 449 | 20% | 573 |
| 1.0 | 825 | 10% | 569 | 80% | 395 | 20% | 496 |
| 1.5 | 766 | 10% | 512 | 50% | 375 | 30% | 456 |
| 2.0 | 702 | 10% | 476 | 50% | 358 | 20% | 431 |
| 3.0 | 686 | 20% | 459 | 30% | 355 | 20% | 407 |
| 4.0 | 667 | 20% | 440 | 30% | 347* | 30% | 396 |
| 5.0 | 665* | 20% | 434 | 30% | 350 | 20% | 391 |
| 6.0 | 673 | 20% | 431* | 30% | 350 | 20% | 387* |
| 7.0 | 684 | 20% | 436 | 30% | 361 | 20% | 397 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 25: DS10 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 134 | 5% | 123 | 40% | 96 | 20% | 121 |
| 1.0 | 108 | 5% | 94 | 20% | 77 | 20% | 91 |
| 1.5 | 102 | 5% | 89 | 20% | 73 | 20% | 86 |
| 2.0 | 101* | 10% | 85 | 20% | 72* | 20% | 83 |
| 3.0 | 104 | 10% | 85 | 20% | 73 | 20% | 82 |
| 4.0 | 102 | 10% | 82* | 20% | 73 | 20% | 80 |
| 5.0 | 103 | 10% | 82* | 20% | 74 | 20% | 79* |
| 6.0 | 105 | 10% | 83 | 20% | 75 | 20% | 80 |
| 7.0 | 108 | 10% | 84 | 20% | 78 | 20% | 81 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 26: DS11 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 2208 | 20% | 1158 | 100% | 970 | 20% | 1224 |
| 1.0 | 1865 | 20% | 1011 | 100% | 817 | 20% | 919 |
| 1.5 | 1790 | 20% | 967 | 100% | 782 | 20% | 893 |
| 2.0 | 1688 | 20% | 918 | 100% | 755 | 20% | 855 |
| 3.0 | 1554 | 20% | 858 | 60% | 713 | 20% | 768 |
| 4.0 | 1510 | 20% | 846 | 50% | 698 | 20% | 776 |
| 5.0 | 1503 | 20% | 836 | 50% | 696 | 20% | 758 |
| 6.0 | 1473 | 20% | 830* | 50% | 693* | 20% | 749* |
| 7.0 | 1461* | 20% | 830* | 40% | 702 | 20% | 754 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 27: DS12 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 1231 | 20% | 929 | 90% | 744 | 30% | 922 |
| 1.0 | 1054 | 20% | 815 | 90% | 636 | 40% | 809 |
| 1.5 | 960 | 20% | 738 | 90% | 588 | 30% | 721 |
| 2.0 | 928 | 30% | 709 | 90% | 572 | 30% | 686 |
| 3.0 | 886 | 30% | 667 | 60% | 557 | 30% | 647 |
| 4.0 | 887 | 30% | 656 | 50% | 557 | 30% | 635 |
| 5.0 | 876* | 30% | 644 | 50% | 558 | 40% | 619 |
| 6.0 | 878 | 30% | 635* | 50% | 556* | 40% | 612* |
| 7.0 | 888 | 30% | 638 | 50% | 568 | 40% | 615 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 28: DS13 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 1224 | 40% | 688 | 100% | 621 | 40% | 639 |
| 1.0 | 1164 | 30% | 624 | 100% | 542 | 30% | 597 |
| 1.5 | 1091 | 30% | 604 | 100% | 498 | 40% | 574 |
| 2.0 | 1001 | 20% | 564 | 100% | 467 | 40% | 534 |
| 3.0 | 971 | 30% | 550 | 90% | 455 | 40% | 508 |
| 4.0 | 934 | 30% | 530 | 80% | 447 | 40% | 497 |
| 5.0 | 921 | 30% | 533 | 70% | 449 | 40% | 497 |
| 6.0 | 919* | 30% | 520* | 60% | 443* | 50% | 485* |
| 7.0 | 925 | 30% | 526 | 60% | 451 | 40% | 490 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 29: DS14 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 85 | 5% | 82 | 30% | 69 | 20% | 88 |
| 1.0 | 69 | 5% | 65 | 20% | 57 | 20% | 68 |
| 1.5 | 65 | 5% | 61 | 20% | 55* | 20% | 64 |
| 2.0 | 64* | 5% | 60 | 20% | 55* | 20% | 62 |
| 3.0 | 67 | 10% | 60 | 10% | 56 | 20% | 62 |
| 4.0 | 66 | 5% | 59* | 10% | 55* | 20% | 61* |
| 5.0 | 67 | 10% | 59* | 10% | 56 | 20% | 62 |
| 6.0 | 69 | 10% | 60 | 10% | 57 | 20% | 63 |
| 7.0 | 71 | 10% | 61 | 10% | 58 | 20% | 65 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 30: DS15 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 738 | 5% | 671 | 20% | 632 | 20% | 692 |
| 1.0 | 632 | 10% | 571 | 20% | 531 | 20% | 580 |
| 1.5 | 576 | 10% | 519 | 20% | 483 | 10% | 517 |
| 2.0 | 557 | 10% | 499 | 20% | 463 | 10% | 497 |
| 3.0 | 532 | 10% | 473 | 20% | 443 | 10% | 470 |
| 4.0 | 532 | 10% | 468 | 20% | 442 | 10% | 466 |
| 5.0 | 525* | 10% | 460* | 20% | 439* | 10% | 458 |
| 6.0 | 527 | 10% | 460* | 20% | 443 | 10% | 457* |
| 7.0 | 533 | 10% | 464 | 20% | 450 | 10% | 461 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 31: DS16 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 1979 | 10% | 1325 | 10% | 1445 | 20% | 1422 |
| 1.0 | 2015 | 10% | 1331 | 10% | 1423 | 10% | 1323 |
| 1.5 | 1948 | 10% | 1299 | 20% | 1327 | 10% | 1280 |
| 2.0 | 1814 | 10% | 1224 | 20% | 1221 | 10% | 1212 |
| 3.0 | 1787 | 10% | 1199 | 20% | 1166 | 20% | 1182 |
| 4.0 | 1727 | 10% | 1168 | 20% | 1117 | 20% | 1148 |
| 5.0 | 1702 | 10% | 1161 | 20% | 1097 | 20% | 1132 |
| 6.0 | 1695* | 10% | 1146* | 20% | 1077* | 20% | 1115* |
| 7.0 | 1697 | 10% | 1153 | 20% | 1081 | 20% | 1122 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 32: DS17 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 86 | 5% | 79 | 30% | 61 | 20% | 80 |
| 1.0 | 69 | 5% | 62 | 20% | 51 | 10% | 61 |
| 1.5 | 65 | 5% | 57 | 20% | 48* | 10% | 56 |
| 2.0 | 64* | 5% | 55 | 10% | 48* | 10% | 53 |
| 3.0 | 67 | 5% | 56 | 10% | 49 | 10% | 53 |
| 4.0 | 66 | 10% | 54* | 10% | 49 | 10% | 53 |
| 5.0 | 67 | 10% | 54* | 10% | 49 | 10% | 52* |
| 6.0 | 68 | 5% | 55 | 10% | 50 | 10% | 53 |
| 7.0 | 70 | 5% | 56 | 10% | 52 | 10% | 54 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 33: DS18 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 580 | 20% | 406 | 60% | 323 | 20% | 374 |
| 1.0 | 507 | 20% | 368 | 50% | 320 | 20% | 335 |
| 1.5 | 496 | 20% | 353 | 60% | 299 | 20% | 323 |
| 2.0 | 464 | 20% | 327 | 60% | 284 | 20% | 298 |
| 3.0 | 441 | 30% | 309 | 40% | 274 | 20% | 284 |
| 4.0 | 438 | 30% | 303 | 40% | 272* | 20% | 279 |
| 5.0 | 442 | 30% | 302 | 40% | 274 | 20% | 279 |
| 6.0 | 434* | 30% | 297* | 40% | 273 | 20% | 274* |
| 7.0 | 446 | 30% | 303 | 40% | 278 | 20% | 280 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 34: DS19 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 1228 | 5% | 791 | 90% | 468 | 50% | 720 |
| 1.0 | 1009 | 10% | 624 | 60% | 411 | 40% | 569 |
| 1.5 | 913 | 10% | 595 | 60% | 379 | 30% | 510 |
| 2.0 | 883 | 10% | 553 | 60% | 372 | 20% | 501 |
| 3.0 | 851* | 10% | 530 | 40% | 368* | 20% | 455 |
| 4.0 | 861 | 10% | 512 | 30% | 370 | 30% | 449 |
| 5.0 | 889 | 20% | 524 | 30% | 383 | 40% | 463 |
| 6.0 | 869 | 20% | 491* | 30% | 374 | 20% | 438* |
| 7.0 | 913 | 20% | 505 | 30% | 389 | 30% | 445 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

Table 35: DS20 Labor for Varying Shapes and Layouts¹

| Shape | No Forward Area | Forward Area Layouts | | | | | |
|-------|-----------------------|----------------------|-------|---------|-------|---------|-------|
| | | Random | | 1-sided | | 2-sided | |
| | | SKUs | Hours | SKUs | Hours | SKUs | Hours |
| 0.5 | 69 | 50% | 31 | 80% | 26 | – | – |
| 1.0 | 61 | 30% | 28 | 90% | 22 | 90% | 25 |
| 1.5 | 60 | 30% | 26 | 90% | 21 | 90% | 23 |
| 2.0 | 54 | 30% | 25 | 60% | 20* | 80% | 21 |
| 3.0 | 52* | 30% | 25 | 70% | 20* | 90% | 21 |
| 4.0 | 53 | 40% | 24* | 70% | 20* | 50% | 21 |
| 5.0 | 53 | 50% | 24* | 50% | 21 | 50% | 21 |
| 6.0 | 55 | 50% | 24* | 50% | 21 | 50% | 21 |
| 7.0 | 56 | 50% | 25 | 50% | 22 | 60% | 22 |

¹ Results assume 6 pallet levels and $\alpha = 0.4$.

* Denotes the best solution for the layout considered.

B. Daily Travel for Different Levels of Pallet Rack

Table 36: DS3: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 119 | 119 | 112 | – | – | – | – | – | – |
| 20 | 100 | 98 | 93 | 81 | 80 | 78 | 92 | 92 | 87 |
| 40 | 112 | 111 | 109 | 85 | 86 | 86 | 100 | 99 | 98 |
| 60 | 128 | 129 | 131 | 94 | 96 | 97 | 110 | 112 | 113 |
| 80 | 146 | 147 | 148 | 104 | 105 | 107 | 123 | 124 | 126 |
| 100 | 165 | 166 | 167 | 112 | 114 | 115 | 136 | 138 | 139 |

Table 37: DS4: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|----|----|----------------|----|----|----------------|----|----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 71 | 66 | 66 | – | – | – | – | – | – |
| 20 | 52 | 49 | 48 | 42 | 40 | 39 | 46 | 44 | 43 |
| 40 | 59 | 55 | 55 | 43 | 42 | 42 | 50 | 48 | 48 |
| 60 | 65 | 65 | 66 | 46 | 46 | 47 | 54 | 54 | 54 |
| 80 | 73 | 74 | 75 | 50 | 51 | 52 | 59 | 60 | 61 |
| 100 | 82 | 83 | 84 | 53 | 54 | 55 | 65 | 66 | 67 |

Table 38: DS5: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|----|----|----------------|----|----|----------------|----|----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 28 | 28 | 28 | – | – | – | – | – | – |
| 20 | 23 | 23 | 23 | 20 | 20 | 20 | 21 | 21 | 21 |
| 40 | 26 | 27 | 27 | 21 | 22 | 23 | 24 | 24 | 25 |
| 60 | 31 | 32 | 32 | 24 | 25 | 25 | 27 | 28 | 28 |
| 80 | 36 | 36 | 37 | 26 | 27 | 27 | 31 | 31 | 32 |
| 100 | 40 | 41 | 41 | 28 | 29 | 29 | 34 | 34 | 35 |

Table 39: DS6: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 511 | 492 | 473 | – | – | – | – | – | – |
| 20 | 315 | 300 | 289 | 253 | 241 | 233 | 263 | 251 | 249 |
| 40 | 372 | 353 | 337 | 226 | 219 | 215 | 283 | 278 | 263 |
| 60 | 421 | 402 | 388 | 239 | 236 | 237 | 315 | 298 | 290 |
| 80 | 438 | 424 | 420 | 255 | 257 | 261 | 326 | 316 | 311 |
| 100 | 456 | 452 | 456 | 269 | 273 | 277 | 339 | 334 | 337 |

Table 40: DS7: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|------|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 1056 | 1008 | 961 | – | – | – | – | – | – |
| 20 | 819 | 782 | 744 | 629 | 605 | 580 | 763 | 726 | 688 |
| 40 | 859 | 824 | 788 | 589 | 574 | 558 | 783 | 748 | 712 |
| 60 | 911 | 874 | 843 | 592 | 580 | 573 | 806 | 777 | 744 |
| 80 | 962 | 937 | 912 | 609 | 611 | 613 | 837 | 813 | 786 |
| 100 | 1021 | 996 | 976 | 641 | 644 | 654 | 869 | 842 | 817 |

Table 41: DS8: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|------|------|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 1256 | 1217 | 1178 | – | – | – | – | – | – |
| 20 | 784 | 773 | 750 | 700 | 680 | 657 | 720 | 722 | 700 |
| 40 | 826 | 790 | 764 | 629 | 603 | 583 | 710 | 673 | 645 |
| 60 | 880 | 843 | 802 | 594 | 573 | 551 | 705 | 699 | 661 |
| 80 | 940 | 894 | 860 | 582 | 562 | 551 | 748 | 707 | 692 |
| 100 | 998 | 953 | 913 | 567 | 554 | 546 | 764 | 744 | 706 |

Table 42: DS9: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 713 | 682 | 686 | – | – | – | – | – | – |
| 20 | 486 | 462 | 459 | 385 | 368 | 368 | 434 | 409 | 407 |
| 40 | 530 | 502 | 497 | 368 | 355 | 356 | 448 | 422 | 427 |
| 60 | 577 | 549 | 540 | 370 | 362 | 363 | 471 | 454 | 444 |
| 80 | 619 | 597 | 602 | 382 | 383 | 388 | 494 | 477 | 482 |
| 100 | 665 | 670 | 675 | 408 | 412 | 417 | 519 | 523 | 528 |

Table 43: DS10: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 107 | 105 | 104 | – | – | – | – | – | – |
| 20 | 91 | 88 | 87 | 74 | 73 | 72 | 85 | 83 | 83 |
| 40 | 100 | 98 | 98 | 80 | 79 | 81 | 92 | 90 | 90 |
| 60 | 111 | 110 | 113 | 87 | 88 | 91 | 100 | 98 | 101 |
| 80 | 125 | 127 | 130 | 97 | 99 | 101 | 109 | 112 | 114 |
| 100 | 138 | 140 | 142 | 105 | 107 | 110 | 118 | 120 | 123 |

Table 44: DS11: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|------|------|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 1638 | 1596 | 1554 | – | – | – | – | – | – |
| 20 | 931 | 882 | 858 | 842 | 800 | 773 | 845 | 803 | 768 |
| 40 | 1067 | 1013 | 975 | 793 | 758 | 729 | 888 | 840 | 803 |
| 60 | 1183 | 1130 | 1084 | 764 | 736 | 713 | 924 | 878 | 861 |
| 80 | 1282 | 1227 | 1177 | 761 | 740 | 723 | 945 | 927 | 903 |
| 100 | 1366 | 1311 | 1259 | 763 | 748 | 738 | 986 | 964 | 937 |

Table 45: DS12: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 961 | 923 | 886 | – | – | – | – | – | – |
| 20 | 732 | 704 | 674 | 698 | 670 | 640 | 722 | 696 | – |
| 40 | 736 | 706 | 673 | 627 | 602 | 577 | 705 | 680 | 648 |
| 60 | 766 | 737 | 704 | 595 | 576 | 557 | 719 | 687 | 660 |
| 80 | 805 | 777 | 747 | 587 | 575 | 563 | 735 | 712 | 684 |
| 100 | 846 | 821 | 795 | 600 | 594 | 588 | 768 | 745 | 719 |

Table 46: DS13: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 982 | 952 | 971 | – | – | – | – | – | – |
| 20 | 561 | 548 | 560 | 572 | 554 | 562 | 548 | 538 | 551 |
| 40 | 582 | 566 | 562 | 516 | 496 | 492 | 534 | 515 | 508 |
| 60 | 638 | 616 | 603 | 489 | 470 | 462 | 538 | 531 | 521 |
| 80 | 693 | 667 | 654 | 477 | 462 | 457 | 569 | 542 | 543 |
| 100 | 742 | 714 | 696 | 473 | 462 | 455 | 585 | 571 | 555 |

Table 47: DS14: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|----|----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 70 | 68 | 67 | – | – | – | – | – | – |
| 20 | 66 | 65 | 64 | 57 | 56 | 56 | 64 | 63 | 62 |
| 40 | 77 | 76 | 78 | 63 | 64 | 66 | 71 | 71 | 73 |
| 60 | 92 | 94 | 96 | 72 | 74 | 76 | 83 | 85 | 86 |
| 80 | 105 | 107 | 109 | 80 | 82 | 84 | 93 | 95 | 96 |
| 100 | 116 | 117 | 119 | 87 | 89 | 91 | 100 | 102 | 104 |

Table 48: DS15: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 576 | 554 | 532 | – | – | – | – | – | – |
| 20 | 520 | 501 | 481 | 476 | 459 | 443 | 512 | 493 | 474 |
| 40 | 580 | 589 | 598 | 488 | 497 | 506 | 556 | 565 | 574 |
| 60 | 712 | 718 | 725 | 558 | 565 | 571 | 668 | 675 | 681 |
| 80 | 824 | 829 | 834 | 613 | 618 | 623 | 760 | 765 | 770 |
| 100 | 918 | 922 | 926 | 664 | 668 | 671 | 841 | 845 | 849 |

Table 49: DS16: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|------|------|----------------|------|------|----------------|------|------|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 1749 | 1721 | 1787 | – | – | – | – | – | – |
| 20 | 1273 | 1247 | 1246 | 1207 | 1168 | 1166 | 1203 | 1182 | 1182 |
| 40 | 1666 | 1689 | 1712 | 1300 | 1324 | 1347 | 1459 | 1482 | 1505 |
| 60 | 2066 | 2079 | 2093 | 1392 | 1405 | 1419 | 1698 | 1711 | 1724 |
| 80 | 2455 | 2463 | 2470 | 1461 | 1468 | 1476 | 1897 | 1905 | 1912 |
| 100 | 2815 | 2819 | 2823 | 1561 | 1565 | 1569 | 2134 | 2138 | 2142 |

Table 50: DS17: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|----|----|----------------|----|----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 70 | 68 | 67 | – | – | – | – | – | – |
| 20 | 61 | 60 | 58 | 52 | 49 | 49 | 57 | 56 | 55 |
| 40 | 69 | 68 | 70 | 54 | 55 | 56 | 63 | 62 | 64 |
| 60 | 80 | 82 | 83 | 62 | 63 | 65 | 71 | 73 | 74 |
| 80 | 90 | 92 | 93 | 69 | 70 | 72 | 78 | 80 | 81 |
| 100 | 101 | 102 | 104 | 74 | 76 | 77 | 86 | 88 | 89 |

Table 51: DS18: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 457 | 436 | 441 | | | | | | |
| 20 | 326 | 313 | 311 | 311 | 297 | 295 | 296 | 283 | 284 |
| 40 | 337 | 323 | 315 | 291 | 280 | 274 | 319 | 307 | 300 |
| 60 | 365 | 350 | 354 | 286 | 278 | 282 | 333 | 320 | 324 |
| 80 | 398 | 400 | 403 | 286 | 289 | 292 | 347 | 350 | 353 |
| 100 | 439 | 442 | 445 | 295 | 298 | 301 | 364 | 367 | 370 |

Table 52: DS19: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 937 | 894 | 851 | – | – | – | – | – | – |
| 20 | 602 | 563 | 539 | 435 | 411 | 396 | 513 | 481 | 455 |
| 40 | 651 | 618 | 584 | 394 | 381 | 368 | 519 | 492 | 491 |
| 60 | 693 | 656 | 627 | 389 | 379 | 374 | 543 | 513 | 506 |
| 80 | 730 | 699 | 666 | 402 | 398 | 395 | 570 | 558 | 528 |
| 100 | 764 | 738 | 711 | 423 | 426 | 428 | 598 | 584 | 555 |

Table 53: DS20: Daily Travel Time for Different Levels of Pallet Rack

| % Forward SKUs | Random Layout | | | 1-Sided Layout | | | 2-Sided Layout | | |
|----------------|---------------|----|----|----------------|----|----|----------------|----|----|
| | Levels | | | Levels | | | Levels | | |
| | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
| 0 | 52 | 52 | 52 | – | – | – | – | – | – |
| 20 | 26 | 26 | 27 | 26 | 26 | 27 | – | – | – |
| 40 | 25 | 24 | 25 | 23 | 22 | 22 | – | – | 23 |
| 60 | 25 | 25 | 25 | 21 | 21 | 21 | – | 22 | 21 |
| 80 | 28 | 27 | 26 | 20 | 20 | 20 | 21 | 22 | 22 |
| 100 | 28 | 28 | 27 | 20 | 20 | 20 | 22 | 22 | 21 |

References

- [1] Bartholdi, J. J., and Hackman, S. T., “Allocating Space in a Forward Pick Area of a Distribution Center for Small Parts,” *IIE Transactions*, **40**, 1046–1053 (2008).
- [2] Bartholdi, J. J., and Hackman, S. T., *Warehouse & Distribution Science* (2011), Version 0.95, downloaded on August 21, 2011.
- [3] Bozer, Y. A., *Optimizing Throughput Performance in Designing Order Picking Systems*, PhD thesis, Georgia Institute of Technology (1985).
- [4] Francis, R. L., “On Some Problems of Rectangular Warehouse Design and Layout,” *The Journal of Industrial Engineering*, **18**(10), 595–604 (1967).
- [5] Frazelle, E. H., Hackman, S. T., and Platzman, L. K., “Improving Order Picking Productivity through Intelligent Stock Assignment Planning,” In *Proceedings of the Council of Logistics Management* (1989).
- [6] Hall, R. W., “Distance Approximations for Routing Manual Pickers in a Warehouse,” *IIE Transactions*, **25**(4), 76–87 (1993).
- [7] McGinnis, L. F., Goetschalckx, M., Sharp, G., Bodner, D., and Govindaraj, T., “Rethinking Warehouse Design Research,” In *Proceedings of the 2000 International Material Handling Research Colloquium*, Charlotte, NC (2000).
- [8] Meller, R. D., and Thomas, L. M., “Optimizing Distribution Center Configuration: A Practical View of a Multi-Objective Problem,” in *Progress in Material Handling Research: 2010*, Material Handling Institute, Charlotte, NC (2010).
- [9] Parikh, P., and Meller, R. D., “A Travel-Time Model for a Person-Onboard Order Picking System,” *European Journal of Operational Research*, **200**(2), 385–394 (2010).
- [10] Thomas, L. M., and Meller, R. D., “Using Analytical Models to Assess Performance in Overall Warehouse Design,” In *Proceedings of the 2013 Industrial and Systems Engineering Research Conference*, San Juan, Puerto Rico (2013).
- [11] Thomas, L. M., and Meller, R. D., “Analytical Models for Warehouse Configuration,” *IIE Transactions*, **46**(9), 928–947 (2014).
- [12] van den Berg, J. P., Sharp, G. P., Gademann, A. N., and Pochet, Y., “Forward-Reserve Allocation in a Warehouse with Unit-Load Replenishments,” *European Journal of Operational Research*, **111**, 98–113 (1998).