



Tuff Guard Safety Railing Model SRT

Manufactured with the safety of your plant personnel and product foremost in mind, the Tuff Guard Safety Railing helps to reduce the costs associated with employee injury, machinery down time, insurance claims, and building repairs due to accidental collisions. Its new design also provides additional acquisition cost savings to you.




- Manufactured with 4" x 4" x 3/16" structural steel square tubing posts for mounting posts.
- Plastic insert caps for mounting post closure and enhanced appearance.
- Hardware for rail attachment included: 2 bolts per side (4 bolts per rail).
- Formed 10 gauge steel rails in lengths up to 12'.
- Standard post heights: 18" and 42".
- 8" square base plates manufactured with 1/2" thick ASTM A36 steel. Hardware includes four 5/8" wedge anchors for concrete mounting.


Features:

- Bolt fasteners are hidden behind the rail for a finished clean look
- With proper installation, railing can withstand impacts of up to a 10,000 pound load at 6 mph.
- Ease of installation
- Reduced freight costs

TUFF GUARD SAFETY RAILING

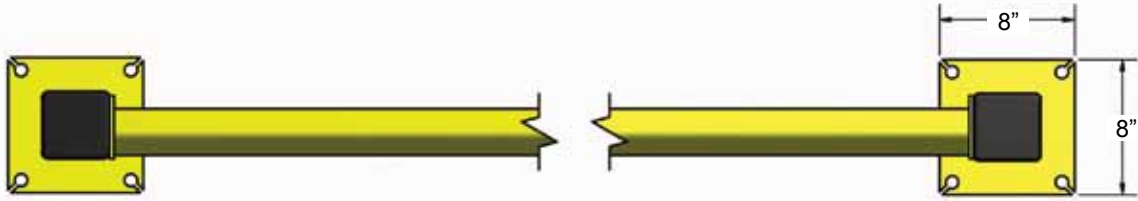

Offset posts are available. Please call 800-433-2212 for more information.

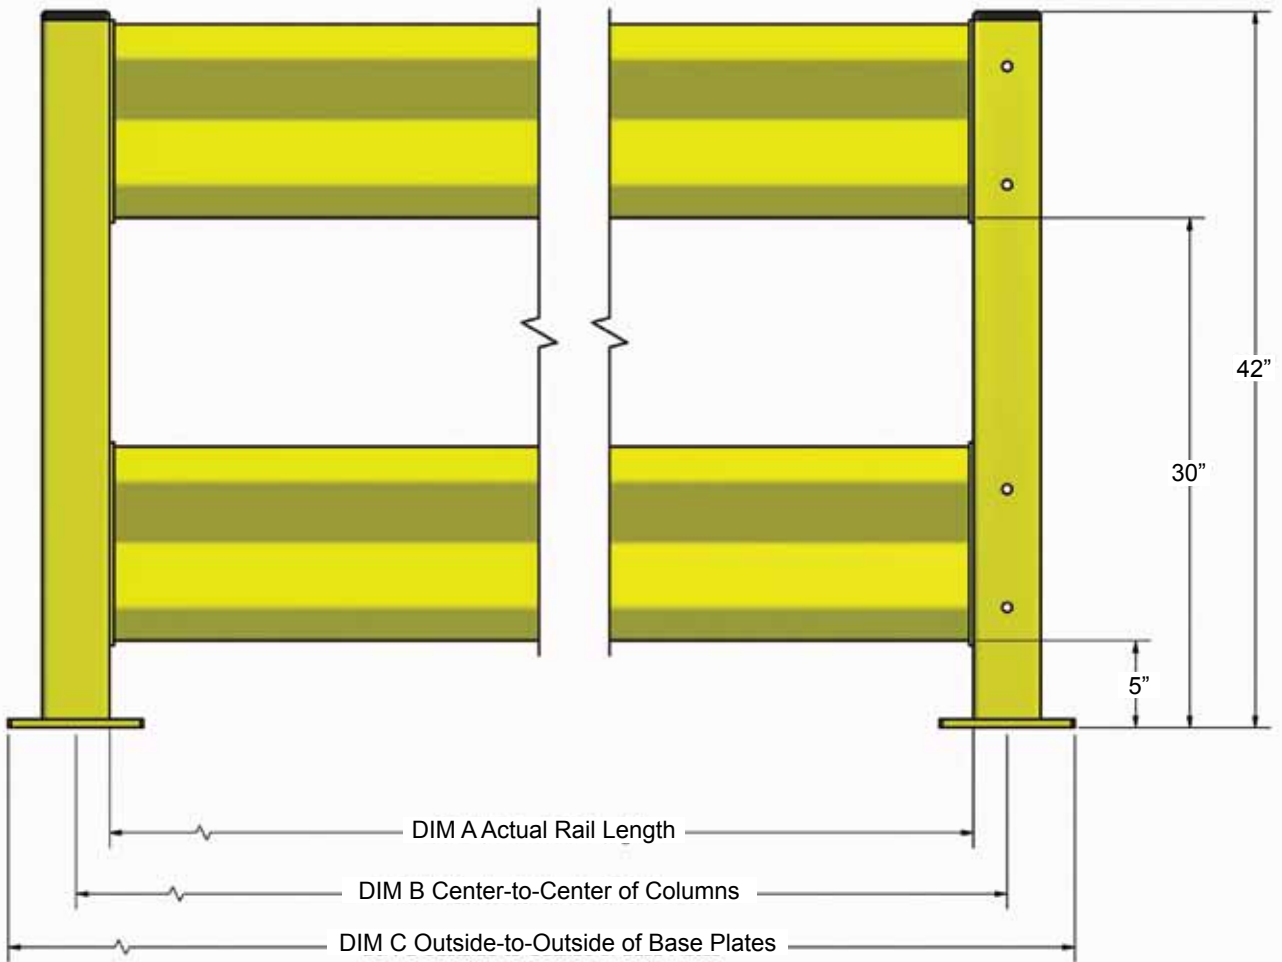

Safety Yellow



Gloss Orange



Red Letter



Blue Ribbon



Campus Green



Gloss Black

Crash Guard products are available in six standard colors, custom colors and galvanized finish.